


Features

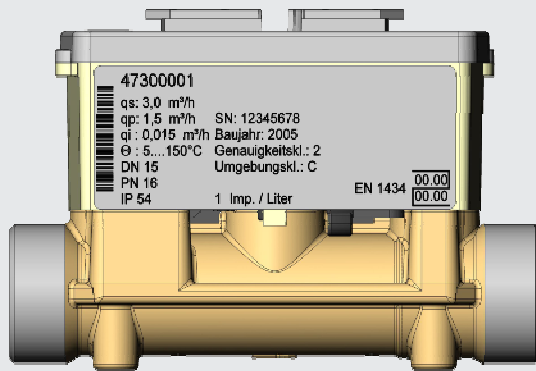

- **Power supply via:**
 - battery 3.0 V DC
 - external supply 3.0 – 5.5 V DC
- **Approved according EN 1434 class 2 and 3**
- **PN 16 or PN 25**
- **No calming sections necessary**
- **Environmental class C**
- **Up to 90 / 105 °C for battery supply**
- **Up to 130 °C (150 °C) for external supply**
- **NOWA test capability**
- **Free selectable pulse value**
- **With pulse cable 2.5 m (5 or 10 m optional)**