

PROINVAL 3-PIECE CHECK VALVE AXIAL OBTURATOR NP 63 SCREWED ENDS BSP / NPT / SW / BW

BVP-13






BV Proinval non-return valves BVP-13 are used in many industrial installations. They allow a quick and efficient closure of the fluid.

RANGE: from ND1/4" up to ND4"

SCREWED ENDS: ASME B1.20.1 (NPT) / DIN 2999 y BS 21



ND	L	C	Kgs.
1/4"	55	18,6	0,37
3/8"	55	18,6	0,37
1/2"	65	22,9	0,52
3/4"	75	27,7	0,68
1"	85	33,5	0,97
1.1/4"	100	41,3	1,67
1.1/2"	110	49,4	2,35
2"	130	63,7	3,54
2.1/2"	160	80,2	7,25
3"	185	100,2	12
4"	220	124,2	22

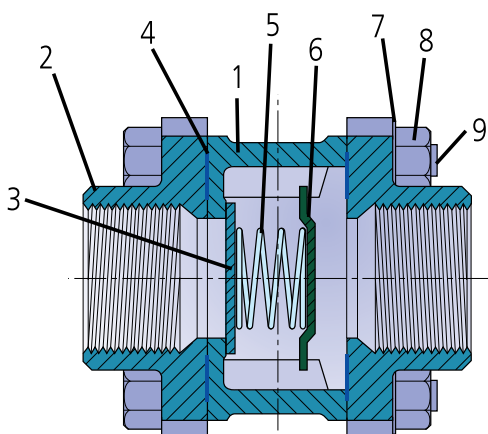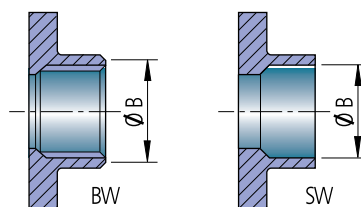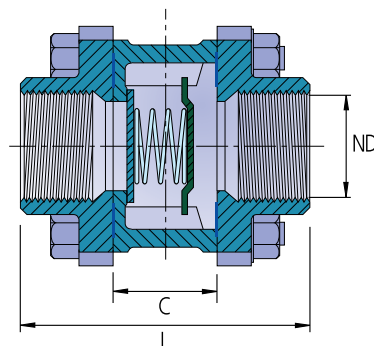


		STAINLESS STEEL	CARBON STEEL
1	BODY	S.S. A351 - CF8M	C.S. A216 WCB
2	CAP	S.S. A351 - CF8M	C.S. A216 WCB
3	DISC	S.S. 316	S.S. 316
4	BODY GASKET	PTFE	PTFE
5	SPRING	S.S. 316	S.S. 316
6	SPRING HOLDER	S.S. 316	S.S. 316
7	WASHER	S.S. 304	S.S. 304
8	NUT	S.S. 304	S.S. 304
9	BOLT	S.S. 304	S.S. 304

GENERAL CHARACTERISTICS:

- 3 piece valve allowing easy maintenance.
- Installation in any position.
- Investment casting.
- Metal / metal seat.
- Optional ends BW and SW.
- High mechanical resistance
- Low pressure drop.
- Total tightness.
- Low cost installation and maintenance.
- Temperature between 0°C and 205°C (depending on working pressure).

PRESSURE - TEMPERATURE RATING

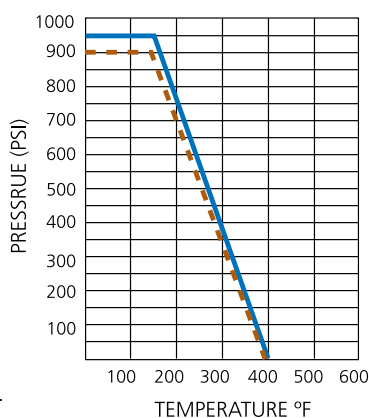

..... WCB — CF8M



