

PROINVAL FLAP VALVE NP 16 FLANGED ENDS DIN NP 10/16



BVP-74

BV Proinval flap valves BVP-74 are used at the end of the pipeline, to avoid back flow during floods.

RANGE: from ND 80 up to ND 800.
FLANGED ENDS: NP 10 / NP 16.
COATING: EPOXY 200µm.



ND	L	D	Kgs.
80	35	200	4
100	40	220	6
150	60	285	12
200	80	340	16
250	100	405	24
300	115	460	32
350	130	520	38
400	145	580	45
450	160	640	60
500	170	715	95
600	200	840	120
700	225	910	150
800	250	1025	250

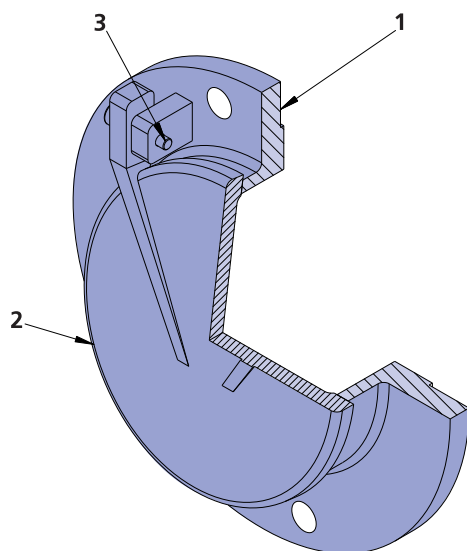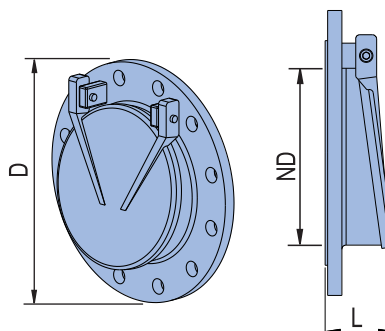

MATERIALS		
1	BODY	DUCTILE IRON GGG50 (GJS500)
2	CAP	DUCTILE IRON GGG50 (GJS500)
3	PIN	STAINLESS STEEL

GENERAL CHARACTERISTICS:

- Full bore.
- Design pressure 16 bar.
- Low cost installation.
- Closure metal / metal.
- It may be manufactured in stainless steel 304 or 316 upon request.



