


PROINVAL DISMANTLING JOINT NP 10 / 16 / 25

BVP-69



BV Proinval telescopic dismantling joints BVP-69 are used next to valves, in installations where occasional dismantling is necessary, without substituting any pipes.

RANGE: from ND 50 up to ND 3000
FLANGES: DIN NP 10 / 16 / 25 / 40
COATING: EPOXY 100mc



ND (mm)	ND (inches)	L1	L2	L3	Kgs. NP10	Kgs. NP16	Kgs. NP25
50	2"	150	180	210	6	6	7
65	2.1/2"	150	180	210	8	8	9
80	3"	150	180	210	10	10	11
100	4"	150	180	210	11	11	12
125	5"	150	180	210	13	13	14,5
150	6"	150	180	210	16	16	18
200	8"	160	200	240	24	25	28
250	10"	160	200	240	30	32	35
300	12"	160	200	240	38	40	44
350	14"	200	240	280	55	57	63
400	16"	200	240	280	71	73	80
450	18"	200	240	280	80	82	90
500	20"	200	240	280	100	125	138
600	24"	250	300	350	130	170	187
700	28"	250	300	350	190	210	231
800	32"	250	300	350	205	240	264
900	36"	250	300	350	250	300	330
1000	40"	250	300	350	300	400	440


ON REQUEST ND >1000 & NP 40

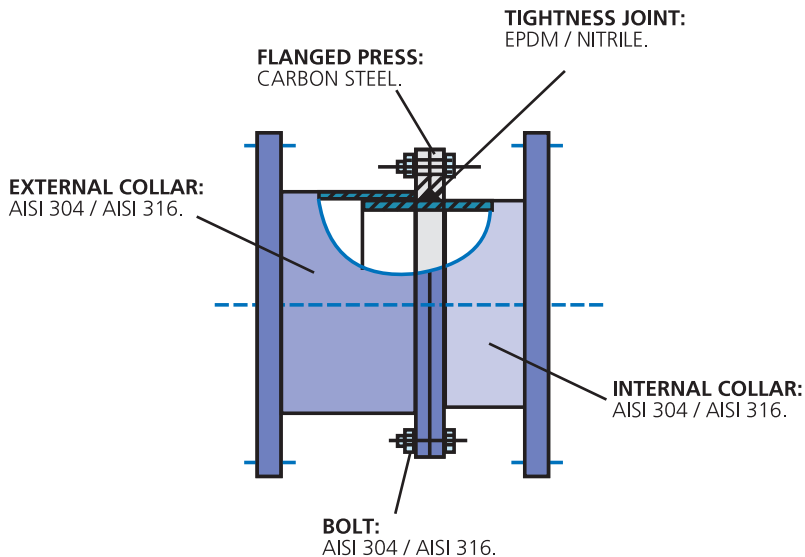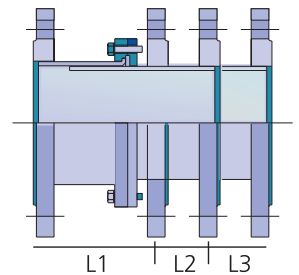

GENERAL CHARACTERISTICS:

- Their design allows the movement of external flanges, allowing an adjustment of their total length.
- Tightness joint in the toric section.
- Both intermediate flanges are mecanized in order to place tightness joint.
- ISO 5208 test.
- Low head loss.
- Temperature between 0°C and 90°C.



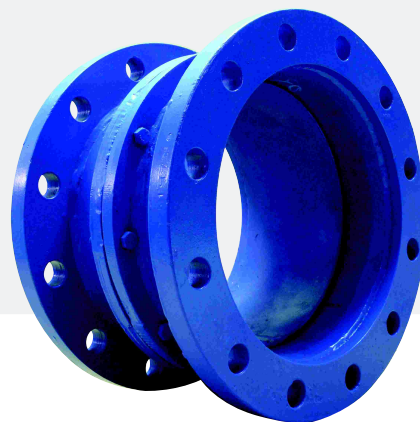

www.proinval.eu

