



PVG 120

Proportional Valves

Technical Information

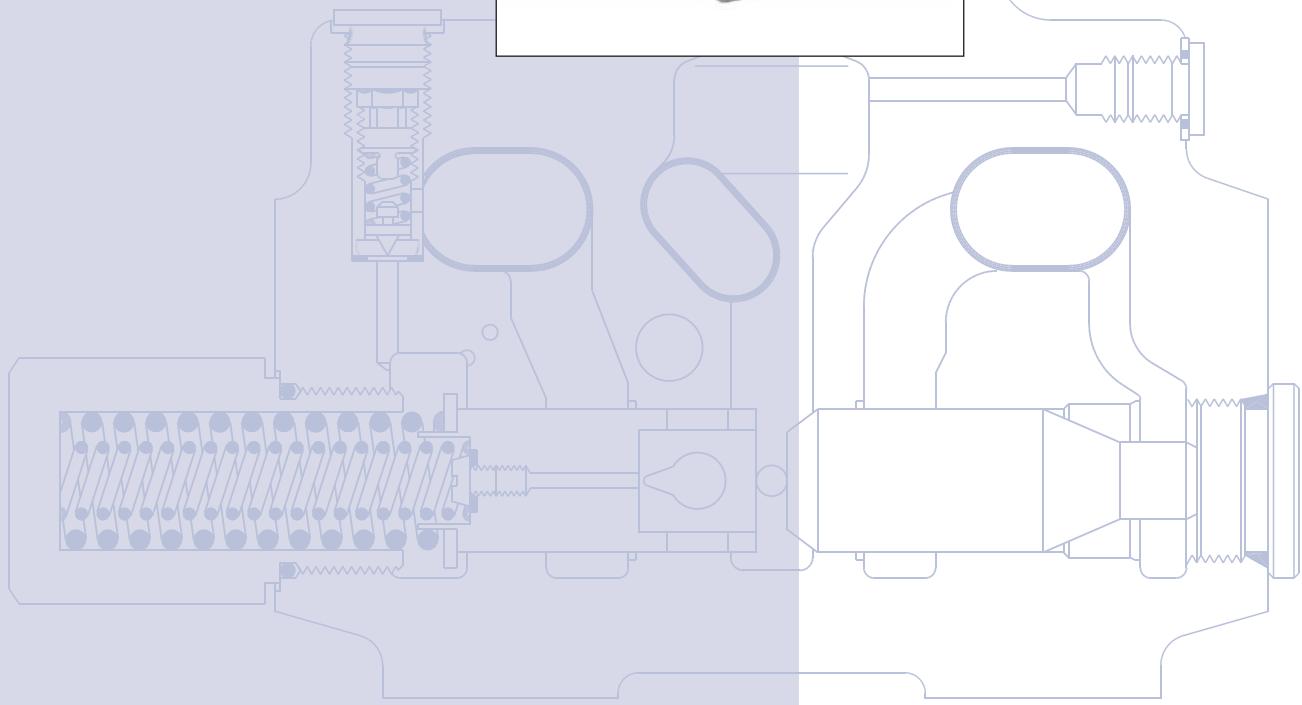



Table of Revisions

Date	Page	Changed	Rev
Apr 2010	Various	Layout, drawings and others	HA
Sep 2010	29, 44	Drawing, new back cover	HB
Sep 2011	All	TOC moved all pages by one, Safety section, SD layout.	IA
May 2012	22-23	Tables PVHC, PVE.	IB

Contents

General Information

Valve system.....	4
General characteristics	4
Pump side module – PVP	4
Basic module – PVB	4
Actuation modules	4
Remote controls units.....	5
Electronic accessories.....	5

Function

PVG 120 with Open Centre PVP	6
PVG 120 with Closed Centre PVP	6
PVG 120 Sectional Drawing	7

Hydraulic Systems

Examples	8
----------------	---

Technical Data

PVG 120 Valve Group	10
Mechanical Actuation PVM.....	10
Hydraulic Actuation PVH	10
PVE, Electrical Actuation	11
PVEO.....	11
PVEH.....	11
PVPE, Electrical Relief Valve, Normally Open.....	12

Electrical Actuation

PVEO, ON-OFF.....	13
PVEH, Proportional High.....	13
PVEH, LVDT-Transducer	14
PVEH, Pulse Width Modulation.....	14
PVEH, Fault Monitoring	14
Fault Monitoring Specification.....	15
PVEH, Connection to Fault Monitoring Output.....	16

© 2012 Sauer-Danfoss. All rights reserved.

Sauer-Danfoss accepts no responsibility for possible errors in catalogs, brochures and other printed material. Sauer-Danfoss reserves the right to alter its products without prior notice. This also applies to products already ordered provided that such alterations can be made without affecting agreed specifications. All trademarks in this material are properties of their respective owners. Sauer-Danfoss, the Sauer-Danfoss logotype, the Sauer-Danfoss S-icon, PLUS+1™, What really matters is inside® and Know-How in Motion™ are trademarks of the Sauer-Danfoss Group.

Frontpage: F301 112, F300 001, F300 009, F300 011, Drawing 155B569.eps

**Modules and Code
 Numbers**

PVP and PVPV, Pump Side Modules	17
PVP, Accessories for Open Centre Pump Side Modules.....	18
PVB, Basic Modules	19
PVB, Accessories for Basic Modules	20
PVLP, Shock and Suction Valves for A and B Port Connections.....	21
PVLA, Suction Valve	21
PVBS, Main Spools.....	22
PVM, Mechanical Actuation.....	22
PVMD, Cover for Mechanical Actuation	22
PVH, Hydraulic Actuation	23
PVH, High Current Actuator.....	23
PVE, Electrical Actuation	23
PVT, Tank Side Modul.....	24
PVAS, Assembly Kit	24
Modules for Oil Flow Exceeding 180 l/min [47.6 US gal/min]	25
Pump with fixed displacement.....	25
Pump with variable displacement.....	25

Technical Characteristics

General	26
PVP, Pump Side Module	26
PVB, Basic Module	27
PVLP, Shock Valve (Pressure Relief Valve in PVLP)	29
PVLP/PVLA, Suction Function	29

Dimensions

Valve Dimensions	30
General Dimensions	31

Lever Positions

PVM, Lever Positions	32
----------------------------	----

Safety in Application

Building in Safety	33
FMEA (Failure Mode and Effect Analysis) IEC EN 61508.....	33
Hazard and Risk Analysis ISO 12100-1 / 14121.....	33
Control System Example.....	34
PVG32 – Mainly used in system with fixed displacement pumps.....	36
PVG100 – Alternative LS dump or pilot supply disconnect.....	36
PVG120 – Pump disconnect/block for variable pumps	36

**Other Operating
 Conditions**

Oil, Particle Content, Degree of Contamination.....	38
Mineral oil, Non-flammable fluids, Biodegradable oils	38
Filtering	39
Conversion Factors	39

Order Specification

Order Form	40
Reordering.....	41

Module Selection Chart

Module Selection Chart	42
------------------------------	----

General

Valve system

Load sensing proportional valve type PVG 120 is a combined directional and flow control valve which is supplied as a valve group consisting of modules specified to match particular customer needs. The flexible nature of this valve will allow an existing valve bank to be easily adapted to suit changes in requirements.



F300 011

General characteristics

- Load-independent flow control:
 - Oil flow to an individual function is independent of the load of this function
 - Oil flow to one function is independent of the load pressure of other functions
- Good regulation characteristics
- Central pilot supply built in when the valves are actuated electrohydraulically
- Energy-saving
- Up to eight basic modules per valve group

Pump side module – PVP

- Built-in pressure relief valve
- System pressure up to 400 bar [5800 psi]
- Pressure gauge connection
- Versions:
 - Open centre version for systems with fixed displacement pumps
 - Open centre version prepared for an extra relief module
 - Closed centre version for systems with variable displacement pumps
 - Closed centre version without system pressure relief valve for variable displacement pumps with built-in pressure relief valve.

Basic module – PVB

- Integrated pressure compensator in channel P
- Interchangeable spools
- Depending on requirements the basic module can be supplied with:
 - Shock/suction valves
 - Adjustable LS pressure limiting valve for ports A and B
 - LS connection
 - Module for oil flows exceeding 180 l/min [47.6 gpm]
 - Different spool variants

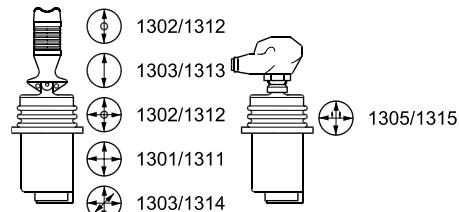
Actuation modules

The basic module is always fitted with mechanical actuation PVM, which can be combined with the following as required:

- Electrical actuation
 - PVEH- proportional, high performance (11 - 32 V==)
 - PVEO - On/off (12 V == or 24 V ==)
- Cover for hydraulic remote control, PVH
- Cover for mechanically actuated valve group, PVMD


General
Remote controls units

- PVRE, electrical control unit, 162F...




155B566.10

- Prof 1, 162F...




162B73.10

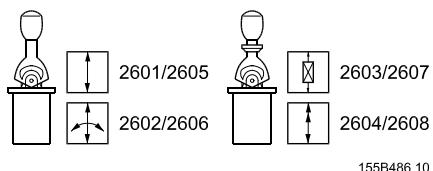- PVREL, electrical control unit, 155U...




155B486.10

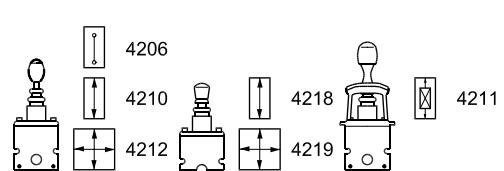- PVRES, electrical control unit, 155B...



155B485.10

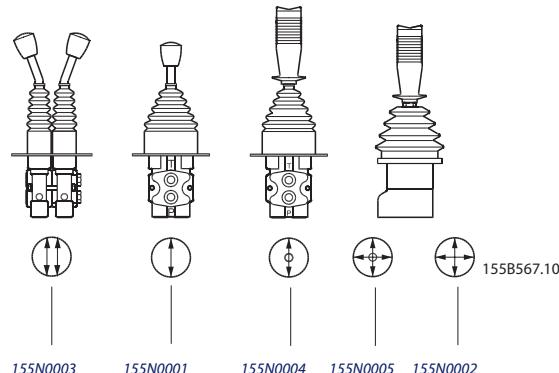- PVRH, hydraulic control unit, 155N...


Electronic accessories

- EHF, low adjustment unit
- EHR, ramp generator
- EHS, speed control
- EHSC, closed loop speed control
- EHA, alarm logic
- EHC, closed loop position control

PVG 120 Proportional Valve

Technical Information

Function

PVG 120 with Open Centre PVP

When the pump is started and the main spools (1) in the individual basic modules are in neutral position, oil flows from the pump, through connection P, across the pressure adjustment spool (2) to tank.

The oil flow led across the pressure adjustment spool determines the pump pressure (stand-by pressure). If a reduced stand-by pressure is required, an extra relief valve PVPH or PVPE can be used in PVP (*see characteristics for neutral flow pressure, page 25*).

When the main spools are actuated the highest load pressure is distributed across the shuttle valve circuit (3) to the spring chamber behind the pressure adjustment spool (2) and completely or partly closes the connection to tank.

The pump pressure is applied to the right-hand side of the pressure adjustment spool (2). The pressure relief valve (4) opens when the load pressure exceeds the set value, allowing pump flow to be diverted back to tank.

In the basic module the compensator (5) maintains a constant pressure drop across the main spool – both when the load changes and when a module with a higher load pressure is activated.

Shock and suction valves with a fixed setting (7) and the suction valves (8) on ports A and B are used to protect individual working functions against overload.

In the basic module it is possible to build in an adjustable LS pressure relief valve (6) to limit the pressure from each working function.

The LS pressure limiting valve saves energy:

- Without LS pressure limiting valve all the oil flow to the working function will be led across the combined shock and suction valves to tank if the pressure exceeds the fixed setting of the valves.
- With LS pressure limiting valve an oil flow of only about 2 l/min [0.5 US gal/min] will be led across the LS pressure limiting valve to tank if the pressure exceeds the valve setting.

PVG 120 with Closed Centre PVP

In the closed centre version an orifice (9) has been fitted instead of the plug. This means that the pressure adjustment spool (2) will only open to tank when the pressure in channel P exceeds the pressure relief valve setting (4).

In load sensing systems the load pressure is led to the pump regulator via the LS connection (10). So the orifices (11) have been removed, and a plug (12) has been fitted instead of one of the orifices.

In neutral position the pump regulator will set the displacement so that leakage in the system is just compensated for.

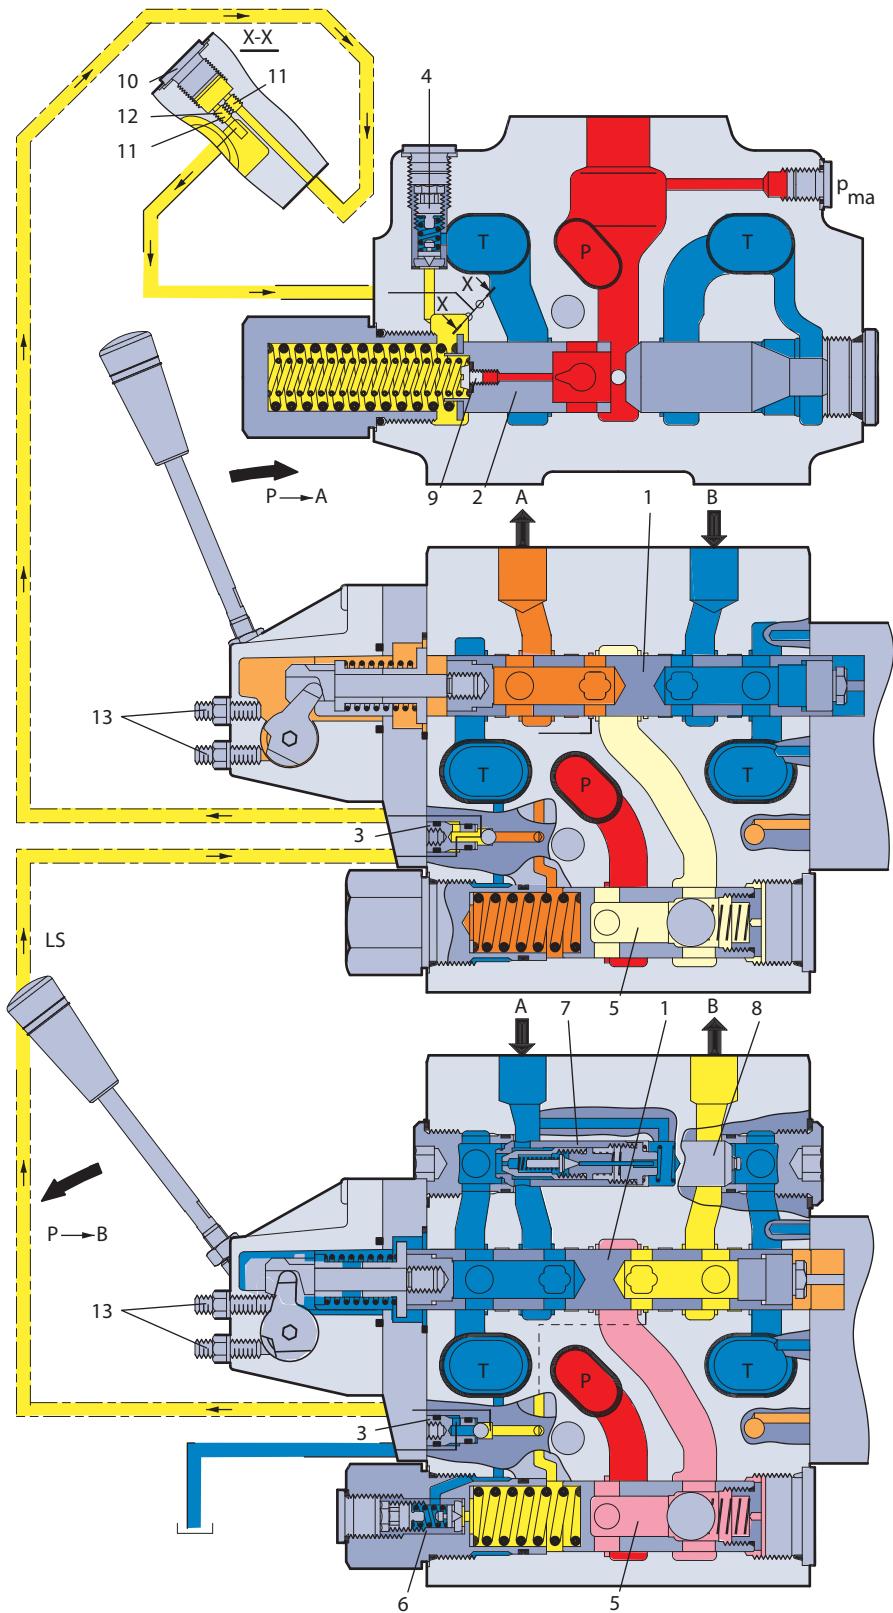
When a main spool is activated, the pump regulator will adjust the displacement so that the set differential pressure between P and LS is maintained.

The pressure relief valve (4) in PVP is set for a pressure of about 30 bar [435 psi] above maximum system pressure (set at the pump or an external pressure relief valve).

If the system or the pump regulation has a pressure relief valve, it is possible to use a PVPV pump side module, without integrated pressure adjustment spool and pressure relief valve.

PVG 120 Sectional Drawing


1. Main spool
2. Pressure adjustment spool in PVP
3. Shuttle valve
4. Pressure relief valve in PVP
5. Pressure compensator in PVB
6. LS pressure relief valve in PVB
7. Shock and suction valve PVLP
8. Suction valve PVLA
9. Orifice, closed centre PVP
Plug, open centre PVP
10. LS connection
11. Orifice, open centre PVP
12. Plug, closed centre PVP




V310100.A

Examples

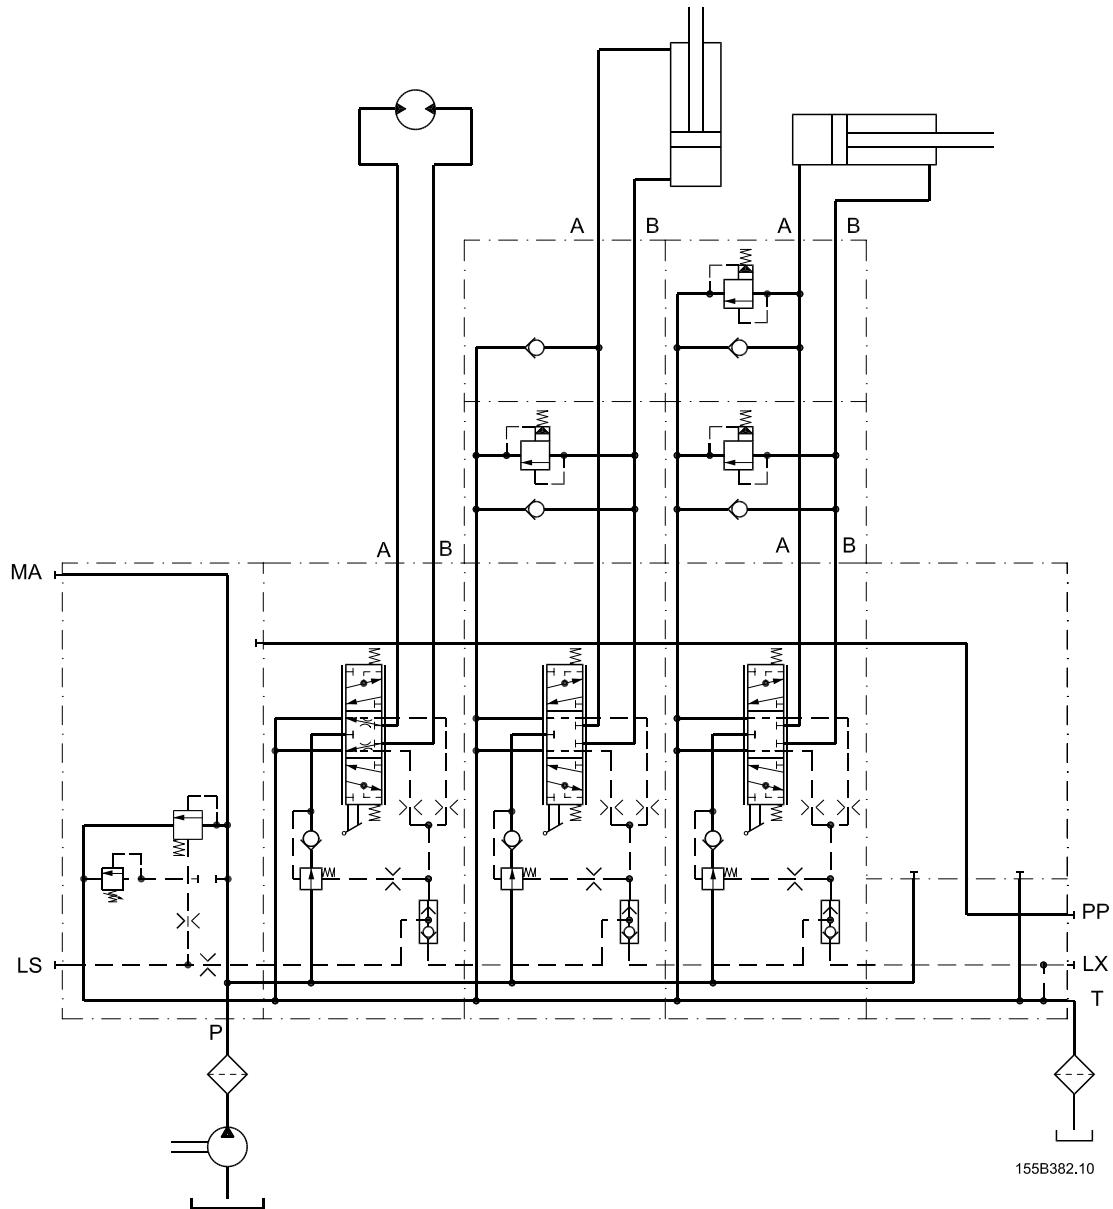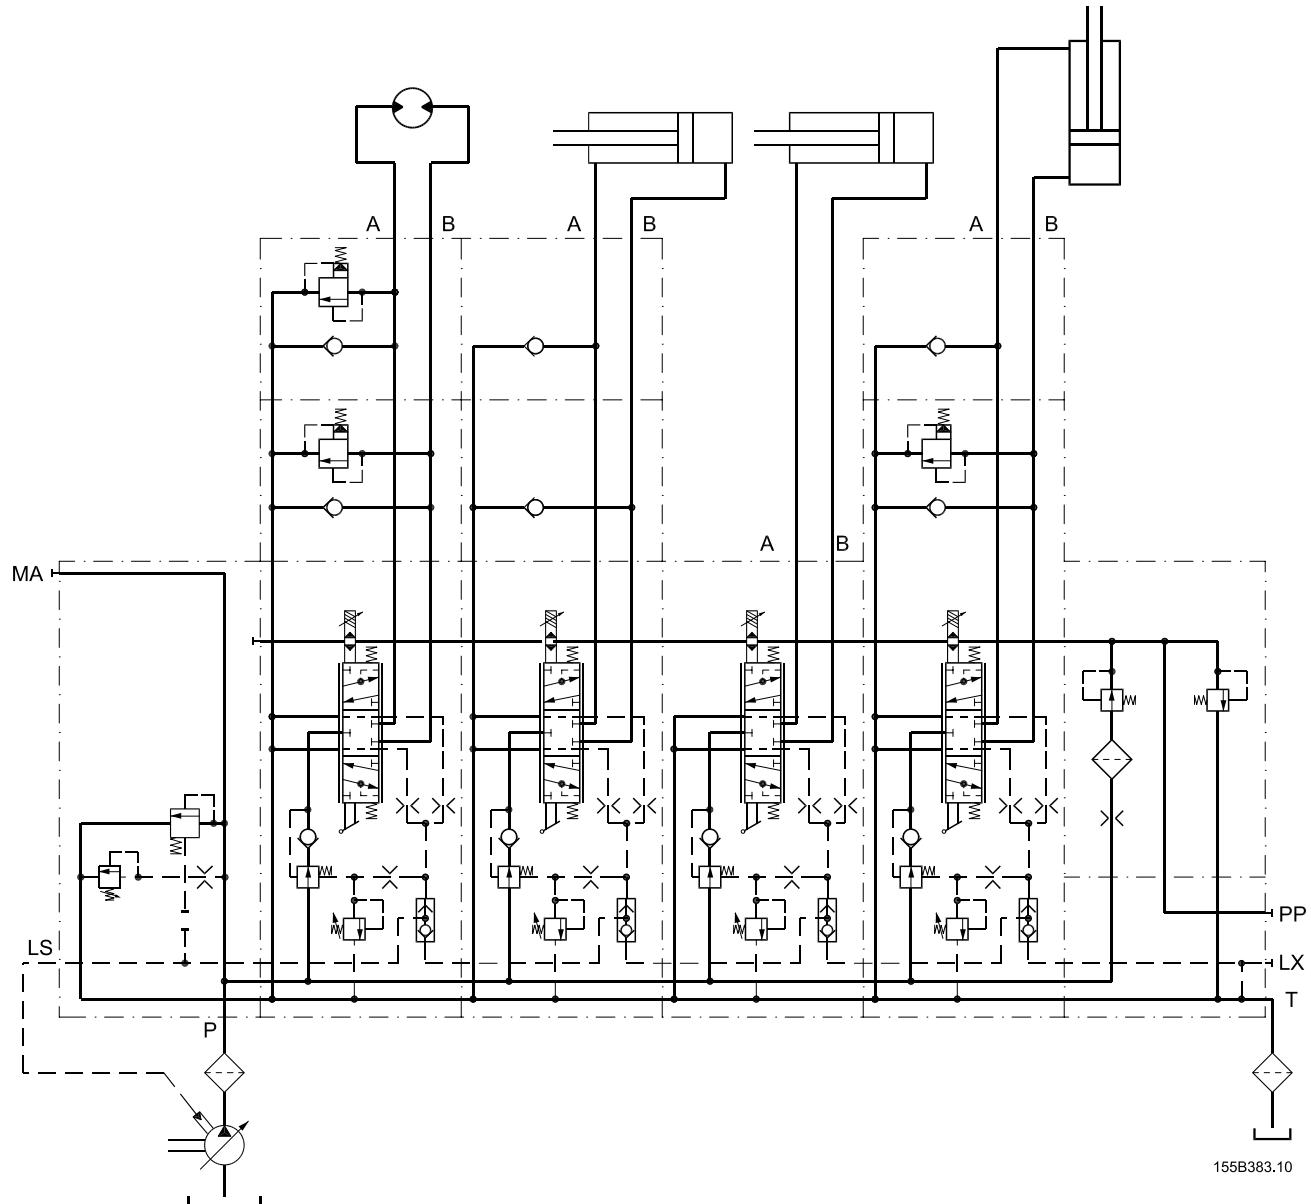PVG 120 with fixed displacement pump



Examples
PVG 120 with variable displacement pump


PVG 120 Proportional Valve

Technical Information

Technical Data

PVG 120 Valve Group

Max. pressure	Port P	continuous	350 bar	[5075 psi]
		intermittent¹⁾	400 bar	[5800 psi]
	Port A/B		400 bar	[5800 psi]
Oil flow, (see characteristics page 27)	Port T, static/dynamic		25 bar/40 bar	[365/580 psi]
	Port P, rated max.		240/300 l/min	[63.4/79.3 gpm]
Spool travel	Port A/B		65/95/130/180/210/240 l/min ²⁾	[17.2/25.1/34.3/47.6/55.5/63.4 gpm ²⁾]
Dead band ($\pm 25\%$)			± 8 mm	[± 0.32 in]
			± 2 mm	[± 0.08 in]
Max. internal leakage at 100 bar, 21 mm²/s	A/B\rightarrowT, without shockvalve		90 cm ³ /min	[5.5 in ³ /min]
	A/B\rightarrowT, with shockvalve		95 cm ³ /min	[5.6 in ³ /min]
Oil temperature (inlet temperature)	Recommended temperature		30 to 60°C	[86 to 140°F]
	Min. temperature		-30°C	[-22°F]
	Max. temperature		+90°C	[+194°F]
Ambient temperature			-30 to +60°C	[-22 to +140°F]
Oil viscosity	Operating range		12 to 75 mm ² /s	[65 SUS to 347 SUS]
	Min. viscosity		4 mm ² /s	[39 SUS]
	Max. viscosity		460 mm ² /s	[2128 SUS]
Filtering (See page 39)	Max. contamination (ISO 4406)			23/19/16
Oil consumption in pressure reduction valve for PVT at PVE pilot-oil supply			0.4 l/min	[0.1 gpm]

1) Intermittent operation: the permissible values may occur for max. 10% of every minute.

2) See page 25 regarding the ordering or conversion of valve groups for oil flows exceeding 180 l/min [47.6 gpm].

Mechanical Actuation PVM

Operating force	PVM + PVMD	Neutral position	Max. spool travel
		2.8 \pm 0.2 N \cdot m [24.8 \pm 1.8 lbf \cdot in]	4.0 \pm 0.2 N \cdot m [35.5 \pm 1.8 lbf \cdot in]
	PVM + PVE (without voltage)	2.8 \pm 0.2 N \cdot m [24.8 \pm 1.8 lbf \cdot in]	4.0 \pm 0.2 N \cdot m [35.5 \pm 1.8 lbf \cdot in]
	PVM + PVH	4.7 \pm 0.2 N \cdot m [41.6 \pm 1.8 lbf \cdot in]	12.8 \pm 0.2 N \cdot m [113.3 \pm 1.8 lbf \cdot in]
Possible control lever positions	Number		2 \times 5
Regulation range, control lever			$\pm 19,5^\circ$

Hydraulic Actuation PVH

Control range	5 to 15 bar	[75 to 220 psi]
Max. pilot pressure, static	35 bar	[510 psi]
Max. pressure on port T *	3 bar	[45 psi]

* It is recommended that the tank connection from the hydraulic remote control unit PVRH is taken direct to tank.

PVE, Electrical Actuation

Actuation		PVEO ON/OFF	PVEH Proportional High
Hysteresis (applies to the electrical actuation only)¹⁾	Typical	-	4%
Reaction time from neutral position to max. spool travel	Typical	250 ms	250 ms
	Max.	350 ms	280 ms
Reaction time from max. spool travel to neutral position²⁾	Typical	240 ms	150 ms
	Max.	330 ms	200 ms
Pilot oil flow pr. PVE	Neutral position without voltage	0 l/min / [US/gal min]	
	Locked with voltage³⁾	0 l/min / [US/gal min]	
Enclosure to IEC 529		IP65	

- 1) The hysteresis is stated at rated and $f = 0,02$ Hz for a cycle. One cycle includes the movement from neutral position to max. spool travel direction A, via neutral position to max. spool travel in direction B, and back to neutral position. Further information can be obtained by contacting the Sales Organization for Sauer-Danfoss.
- 2) Reaction times for PVEH is reduced by 20 by 30 ms if the voltage is not interrupted during the neutral positioning (remote control lever without neutral position switch).
- 3) Total oil consumption for a spool movement from N to full A or B: 0.0035 l [0.0009 US gal]

PVEO

		PVEO	
Supply voltage UDC	rated	12 V DC	24 V DC
	range	11 V to 15 V	22 V to 30 V
	max. ripple	5%	
Current consumption at rated voltage		0.65 A @ 12 V	0.33 A @ 24 V
Signal voltage (PVEM)	neutral	0.5 x UDC	
	A-port ↔ B-port	0.25 • UDC to 0.75 • UDC	
Signal current at rated voltage (PVEM)		0.25 mA	0.50 mA
Input impedance in relation to 0.5 • UDC		12 KΩ	
Power consumption		8 W	

PVEH

		PVEH	
Supply voltage UDC	rated	11 V to 32 V	
	range	11 V to 32 V	
	max. ripple	5%	
Current consumption at rated voltage		0.57 (0.33) A @ 12 V	0.3 (0.17) A @ 24 V
Signal voltage	neutral	0.5 x UDC	
	A-port ↔ B-port	0.25 • UDC to 0.75 • UDC	
Signal current at rated voltage		0.25 mA to 0.70 mA	
Input impedance in relation to 0.5 • UDC		12 KΩ	
Input capacitor		100 F	
Power consumption		7 (3.5) W	
PVEH	Max. load	100 mA	60 mA
	Active	500 ms	
	Passive	250 ms	

PVG 120 Proportional Valve
 Technical Information
 Technical Data


**PVPE, Electrical Relief
 Valve, Normally Open**

Max. operation pressure	350 bar [5085 psi]	
Max. pressure drop at an flow of 0.20 l/min. [0.053 US gal/min]	1.2 bar [17 psi]	
Oil temperature (inlet temperature)	Recommended temperature	30 to 60°C [86 to 140°F]
	Min. temperature	-30°C [-22°F]
	Max. temperature	+90°C [+194°F]
Max. coil surface temperature	155°C [311°F]	
Ambient temperature	-30 to +60°C [-22 to +140°F]	
Oil viscosity	Operating range	12 to 75 mm ² /s [65 to 347 SUS]
	Min. viscosity	4 mm ² /s [39 SUS]
	Max. viscosity	460 mm ² /s [2128 SUS]
Response time for pressure relief to tank	600 ms	
Enclosure to. IEC 529	IP 65	
Rated voltage	12 V	24 V
Max. permissible deviation from rated supply voltage	± 10 %	
Current consumption at rated voltage	at 22°C [72°F] coil temperature	1.55 A
	at 85°C [230°F] coil temperature	1.00 A
Power consumption	at 22°C [72°F] coil temperature	19 W
	at 85°C [230°F] coil temperature	12 W
		19 W
		12 W

PVEO, ON-OFF

Main features of PVEO:

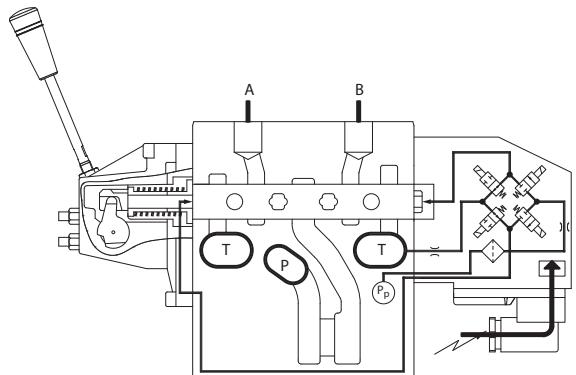- Compact
- Robust operation
- With Hirschmann or AMP connector
- Low electrical power



V310185.A

PVEH, Proportional High

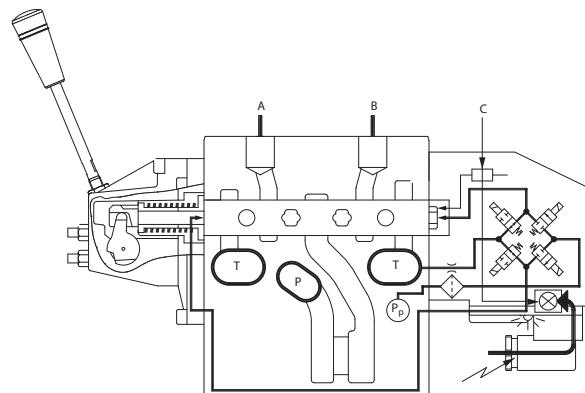
PVEH adjusts the main spool position so that it corresponds to an electrical control signal – for example from a remote control unit.

The control signal (set-point signal) is converted into a hydraulic pressure which moves the main spool. The position of the main spool is converted in the positional transducer (C) to an electric signal (feed-back signal). This signal is registered by the electronics.

The variation between the set-point signal and feed-back signal actuates the solenoid valves. Thus the hydraulic pressure moves the main spool into the correct position.

Special features of PVEH:

- Inductive transducer
- Integrated pulse width modulation
- Low hysteresis
- Fast reaction time
- Hirschmann or AMP connector
- Fault monitoring with transistor output for signal source
- Low electrical power
- No set-up procedure



V310099.A

PVEH, LVDT-Transducer

LVDT, Inductive transducer (Linear Variable Differential Transformer)

When the main spool is moved a voltage is induced proportional to the spool position. The use of LVDT gives contact-free (proximity) registration of the main spool position. This means an extra-long working life and no limitation as regards the type of hydraulic fluid used. In addition, LVDT gives a precise position signal of high resolution.

PVEH, Pulse Width Modulation

Integrated pulse width modulation

Positioning of the main spool in PVEH is based on the pulse width modulation principle. As soon as the main spool reaches the required position, modulation stops and the spool is locked in position.

PVEH, Fault Monitoring

A fault monitoring system is provided in all PVEA, PVEH and PVES modules. The system is available in two versions:

- The active fault monitoring type, which provides a warning signal, deactivates the solenoid valves and drives the spool in neutral.
- The passive fault monitoring type, which provides a warning signal only.

Both active and passive fault monitoring systems are triggered by three main events:

1. Input signal monitoring

The input signal voltage is continuously monitored. The permissible range is between 15% and 85% of the supply voltage. Outside this range the section will switch into an active error state.

2. Transducer supervision

If one of the wires to the LVDT sensor is broken or short-circuited, the section will switch into an active error state.

3. Supervision of the closed loop

The actual position must always correspond to the demanded position (input signal). If the actual spool position is further than the demanded spool position (>12%, PVEA: >25%), the system detects an error and will switch into an active error state. On the other hand, a situation where the actual position is closer to neutral than that demanded will not cause an error state. This situation is considered "in control".

When an active error state occurs, the fault monitoring logic will be triggered:

Active fault monitoring

- A delay of 500 ms (PVEA: 750 ms) before anything happens.
- The solenoid valve bridge will be disabled and all solenoid valves will be released.
- An alarm signal is sent out through the appropriate pin connection.
- This state is memorized and continues until the system is actively reset (by turning off the supply voltage).

Passive fault monitoring

- A delay of 250 ms (PVEA: 750 ms) before anything happens.
- The solenoid valve bridge will not be disabled but still control the main spool position.
- An alarm signal is sent out through the appropriate pin connection.
- This state is not memorized. When the erroneous state disappears, the alarm signal will turn to passive again. However, the signal will always be active for a minimum of 100 ms when triggered.

**PVEH, Fault Monitoring
 (continued)**

To prevent the electronics from going into an undefined state, a general supervision of the power supply and the internal clock frequency is made. This function applies to PVEH - and will not activate fault monitoring:

1. High supply voltage

The solenoid valves are disabled when the supply voltage exceeds 36 V, and the main spool will return/stay in neutral.

2. Low supply voltage

The solenoid valves are disabled when the supply voltage falls below 8.5 V, and the main spool will return/stay in neutral.

3. Internal clock

The solenoid valves are disabled when the internal clock frequency fails, and the main spool will return/stay in neutral.

⚠ Warning

It's up to the customer to decide on the required degree of safety for the system.

Different degrees of safety are described on *pages 34 to 37*.

The fault monitoring does not work if the supply voltage to PVEH is cut off - for example by a neutral position switch.

When using PVEH with passive fault monitoring it is up to the customer to decide on the degree of safety required for the system (*see page 34*).


**Fault Monitoring
 Specification**

Type	Fault	Delay before error out	Error mode	Error output status	Fault output on PVE ¹⁾	LED light	Memory (reset needed)
PVEO	No fault monitoring	-	-	-	-	-	-
PVEH	Active	500 ms	No fault	Low	< 2 V	Green	-
			Input signal faults	High	~U _{DC}	Flashing red	Yes
			Transducer (LVDT)			Constant red	
			Close loop fault				
	Passive	250 ms	No fault	Low	< 2 V	Green	-
			Input signal faults	High	~U _{DC}	Flashing red	No
			Transducer (LVDT)			Constant red	
			Close loop fault				


¹⁾ Measured between fault output pin and ground.

PVEH, Connection to Fault Monitoring Output

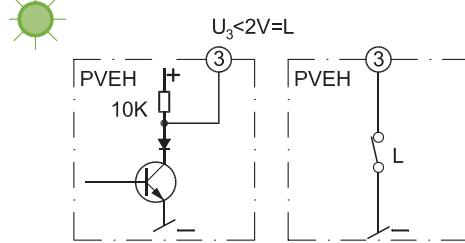Green
Transistor output function





Normal

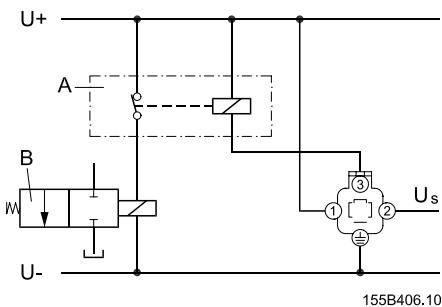

- A: External relay
- B: Solenoid valve (e.g. PVPE)

Fault

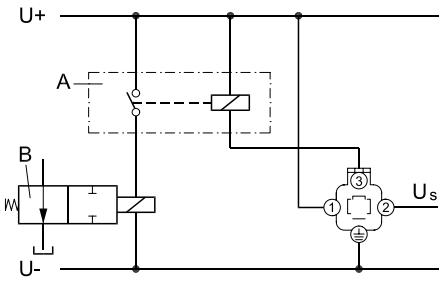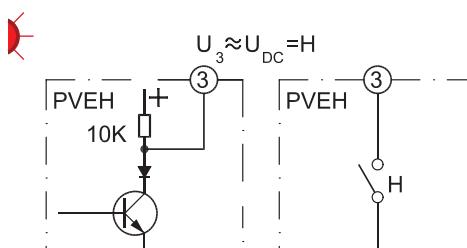Red
Transistor output function



- A: External relay
- B: Solenoid valve (e.g. PVPE)

Via an external relay pin 3 can be connected to an electrically actuated valve which will relieve pump oil flow to tank, e.g. PVPE.

Other connections possible:

- a valve to relieve the LS signal
- a signal lamp, an alarm horn
- pump cut-out, etc.




PVP and PVPV, Pump Side Modules

Symbol	Description		Code number
 155B368.10	Open centre PVP for pumps with fixed displacement. Pressure gauge connection.	Metric flange	155G5021
		SAE flange	155G5037
		O-ring boss	155G5023
 155B368.10	Open centre PVP for oil flow exceeding 180 l/min. [47.55 US gallon/min]. For pumps with fixed displacement. Pressure gauge connection	Metric flange	155G5027
		SAE flange	155G5029
		O-ring boss	155G5028
 155B371.10	Closed centre PVP for pumps with variable displacement. Pressure gauge connection.	Metric flange	155G5020
		SAE flange	155G5038
		O-ring boss	155G5022
 155B372.10	Closed centre PVPV without pressure relief valve. For pumps with variable displacement. Pressure gauge connection	Metric flange	155G5030
		SAE flange	155G5032
		O-ring boss	155G5031

 Port connections: P = 1 in SAE flange (415 bar [6020 psi]); MA = G $\frac{1}{4}$; LS = G $\frac{3}{8}$


 P = $1\frac{1}{16}$ - 12 UN O-ring Boss 6020 psi; MA = $1\frac{1}{2}$ - 20 UNF O-ring Boss; LS = $\frac{3}{4}$ - 16 UNF O-ring Boss

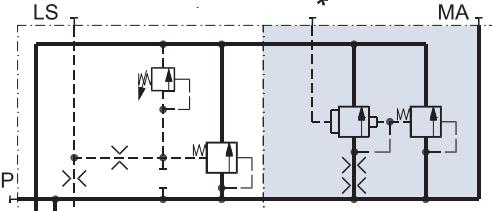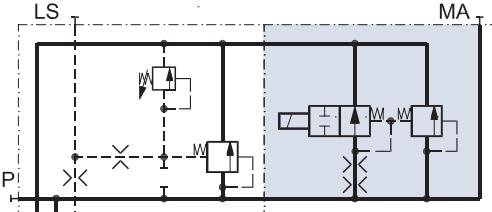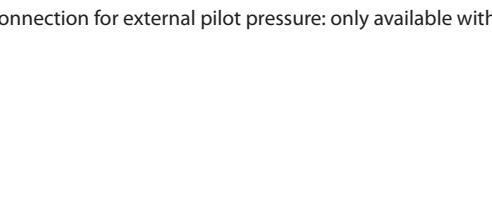PVP, Accessories for Open Centre Pump Side Modules

Symbol	Description	Code number
	Prop, PVPD	155G5041
	PVEH, hydraulically actuated relief valve	155G5061*
	PVPE, electrically actuated relief valve. Normally open solenoid valve	(12 V --) 155G5052
		(24 V --) 155G5054




* Connection for external pilot pressure: only available with G 1/4 thread

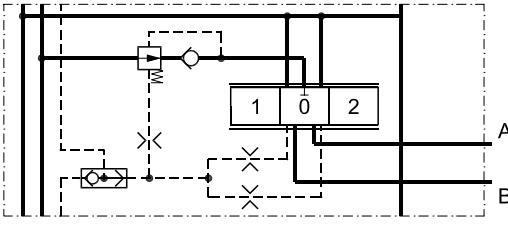PVB, Basic Modules

Symbol	Description	Code number	
		No facilities for shock valves A/B (low modules)	Facilities for shock valves A/B (high modules)
 155B376.10	Metric flange	155G6014	155G6005
	Pressure compensated basic module	155G6016	155G6007
	SAE flange	155G6015	155G6006
	O-ring boss		


Port connections: A/B: $\frac{3}{4}$ in SAE flange 415 bar (6020 psi);
A/B: $1\frac{1}{16}$ - 12 UN O-ring Boss 415 bar (6020 psi)

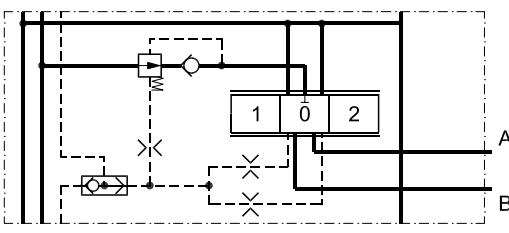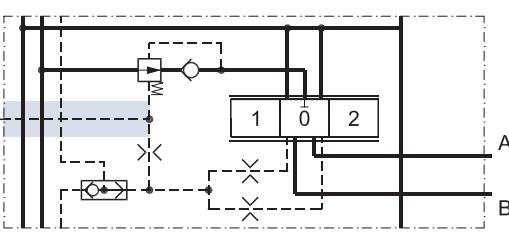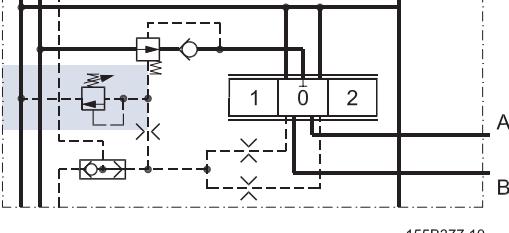PVB, Accessories for Basic Modules


Symbol	Description	Code number
	PVBP, plug	155G6081
	PVBU, module for oil flow exceeding 180 l/min [47.6 US gallon/min]. Connection for external LS pressure relief.	155G6035
	PVBC, connection for external LS pressure relief.	155G6082
	PVBR, LS-pressure relief valve for ports A/B-port	155G6080

Port connections: G 1/4; only available with G 1/4 thread




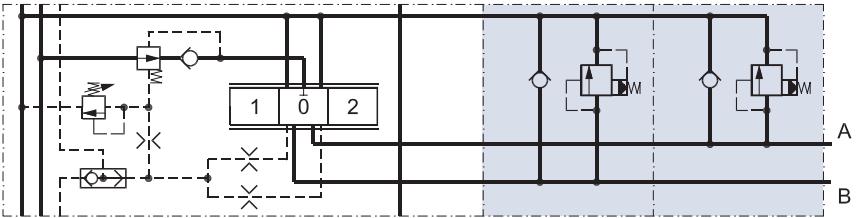
PVLP, Shock and Suction Valves for A and B Port Connections

Symbol	Fixed setting		Code number
	bar	[psi]	
	50	[725]	155G0050
	75	[1100]	155G0075
	100	[1450]	155G0100
	125	[1800]	155G0125
	150	[2200]	155G0150
	175	[2550]	155G0175
	200	[2900]	55G0200
	225	[3240]	155G0225
	250	[3650]	155G0250
	275	[4000]	155G0275
	300	[4350]	155G0300
	325	[4700]	155G0325
	350	[5100]	155G0350
	375	[5450]	155G0375
	400	[5800]	155G0400

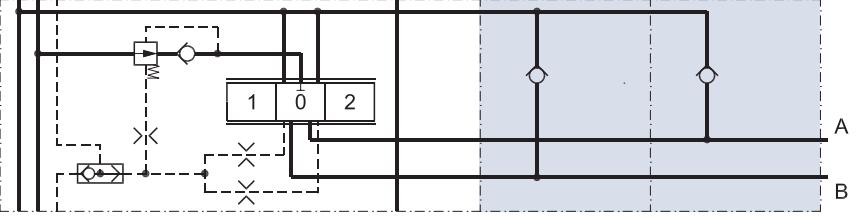PVLA, Suction Valve


Symbol	Code number
	155G1065

PVBS, Main Spools

Symbol	ISO Symbol	Description	Code number Size			
			A 65 l/min [17.2 US gal/min]	B 95 l/min [25.1 US gal/min]	C 130 l/min [34.3 US gal/min]	D ¹⁾ 180 l/min [47.6 US gal/min]
 155B235.10	 155B384.10	4-way, 3-position. Closed neutral position	155G6452	155G6454	155G6456	155G6458
 155B236.10	 155B385.10	4-way, 3-position. Throttled, open neutral position		155G6464	155G6466	155G6468
 155B226.10	 155B386.10	3-way, 3-position P → B			155G6476	155G6478

1) Main spool D is used for oil flow exceeding 180 l/min [47.6 US gal/min]


PVM, Mechanical Actuation

Symbol	Description	Code number
 155B387.10	PVM, standard, spring centered mechanical actuation. Individual oil flow adjustment to ports A and B.	22,5° 155G3040
		37,5° 155G3041
 155B387.10	PVM, mechanical actuation for hydraulically operated valves. Individual oil flow adjustment to ports A and B.	22,5° 155G3050
		37,5° 155G3051


PVMD, Cover for Mechanical Actuation

Symbol	Description	Code number
	PVMD, cover for purely mechanically operated valve.	155G4061



PVH, Hydraulic Actuation

Symbol	Description	Code number	
	PVH, cover for hydraulically operated valve.	G 1/4	155G4022
155B339.10		1/2 in-20 UNF	155G4021






PVHC, High Current Actuator

Symbol	Description	Code number		
		Hirschmann	AMP	Deutsch
	PVHC	12 V	-	-
		24 V	-	-
155B388.10				11110597
				11110598

PVE, Electrical Actuation

Symbol	Description	Code number		
		Hirschmann	AMP	Deutsch
	PVEO, ON/OFF	12 V	155G4272	155G4282
		24 V	155G4274	155G4284
	PVEH, Proportional high. Puls width modulation, short reaction time, low hysteresis, active fault monitoring, inductive transducer	155G4092	155G4094	-
		155G4093	155G4095	11111206
	PVEH, Proportional high. Puls width modulation, short reaction time, low hysteresis, passive fault monitoring, inductive transducer	11111210	-	11111207
		-	11111117	11111113

PVT, Tank Side Modul

Symbol	Description	Code number
 155B380.10	Upper part: Without active elements	Metric flange 155G7020
		SAE flange 155G7022
		O-ring boss 155G7021
	 155B380.10	Metric flange 155G7023
		SAE flange 155G7025
		O-ring boss 155G7024
 155B435.10	Lower part: Without active elements	Mounting 155G7060
		Mounting thread UNF 155G7062
 155B381.10	Lower part: PVE, pilot oil supply for electrical actuations. Filter mesh: 125µm	Mounting thread metric 155G7040
		Mounting thread UNF 155G7042
 155B381.10	Lower part: PVH, pilot oil supply for hydraulic actuations. Filter mesh: 125µm	Mounting thread metric 155G7043
		Mounting thread UNF 155G7044

Port connections: T = 1 in SAE flange 210 bar [3045 psi]; PP = G 3/8 [3/8 in SAE] LX = G 3/8 [3/8 in SAE].

T = $\frac{15}{16}$ - 12 UN O-ring Boss 3045 psi; PP = $\frac{3}{4}$ - 16 UNF O-ring Boss; LX = $\frac{3}{4}$ - 16 UNF O-ring Boss

PVAS, Assembly Kit

	Code number 155G...							
	1 PVB	2 PVB	3 PVB	4 PVB	5 PVB	6 PVB	7 PVB	8 PVB
Tie bolts and seals	155G8031	155G8032	155G8033	155G8034	155G8035	155G8036	155G8037	155G8038

**Modules for Oil Flow
Exceeding 180 l/min
[47.6 US gal/min]**

Pump with fixed displacement

1. Ordering:

Order accessory module 155G6035, main spool D, and pump side modules 155G5027/155G5028/155G5029

2. Conversion:

In open centre systems a max. oil flow exceeding 180 l/min [47.6 US gal/min] is achieved by changing the following parts in the pump side and basic modules:

- Open centre pump side module
 - a. Pressure adjustment spool
 - b. The springs behind the pressure adjustment spool
 - c. The plug behind the pressure adjustment spool

Parts from kit 155G5035 may be used.

- Closed centre pump side module

A closed centre pump side module can be changed into an upgraded open centre pump side module by means of kit 155G5035.

- Basic module
 - d. Spring behind pressure compensator
 - e. The plug behind the pressure compensator

Spring and plug with code number 155G6035 (PVBU, accessory module).

Pump with variable displacement

1. Ordering:

Order accessory module 155G6035 and main spool D.

2. Conversion:

In closed centre systems a max. oil flow exceeding 180 l/min [47.6 US gal/min] can be achieved by changing the following basic module parts:

- a) Spring behind pressure compensator
- b) The plug behind the pressure compensator

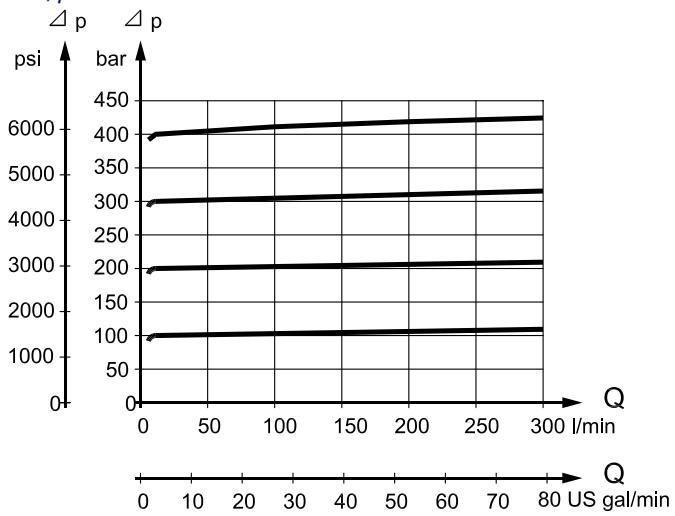
The code number of the spring and plug is 155G6035 (PVBU, accessory module).

General

All characteristics and values in this Technical Information are typical measured results. For the hydraulic system a mineral based hydraulic oil with a viscosity of 21mm²/s [102 SUS] and a temperature of 50°C [122°F] was used.

PVP, Pump Side Module


PVP, pressure relief valve characteristic



155B187.10

The pressure relief valve is adjustable within the 50-400 bar [725-6225 psi] range by means of a screw.

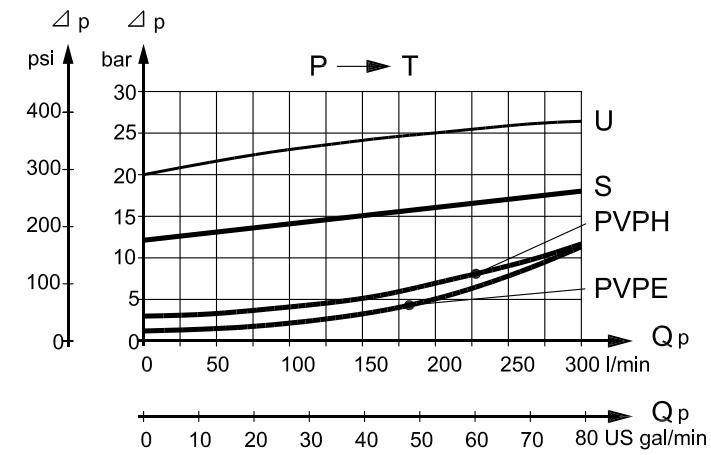
PVP, neutral flow pressure in PVP, open centre



155B390.10

U = PVP for PVB oil flow > 180 l/min [47.6 US gal/min]

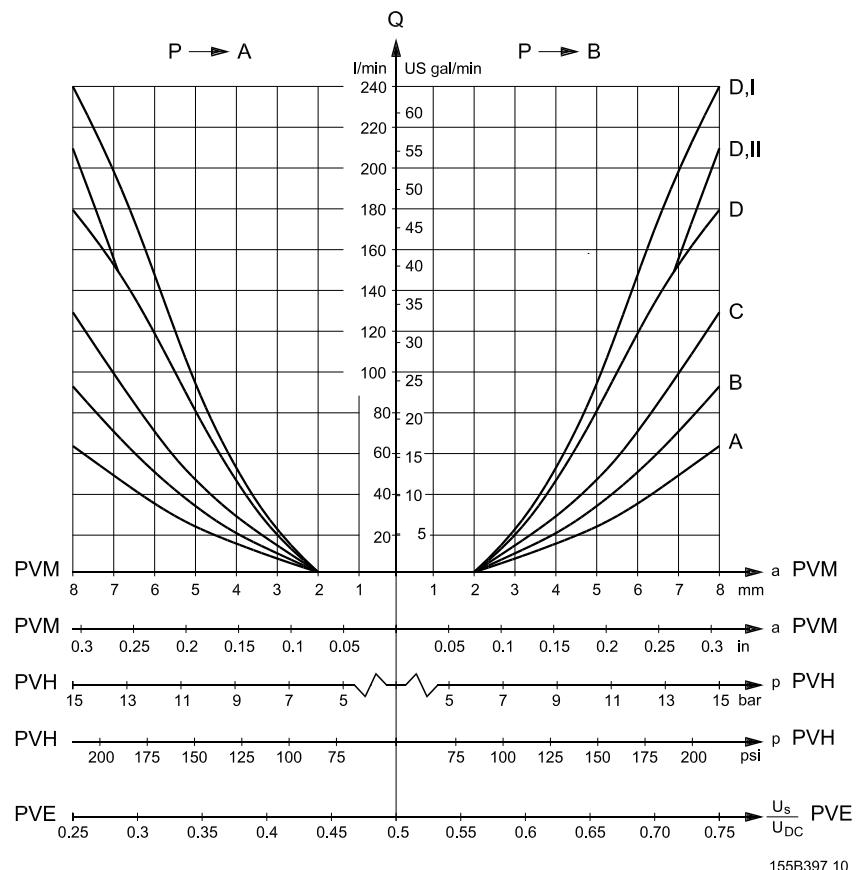S = PVP, standard

PVB, Basic Module
Oil flow characteristics


155B397.10

- A : 65 l/min [17.2 US gal/min] rated oil flow
- B : 95 l/min [25.1 US gal/min] rated oil flow
- C : 130 l/min [34.3 US gal/min] rated oil flow
- D : 180 l/min [47.6 US gal/min] rated oil flow
- D.I : 240 l/min [63.4 US gal/min] rated oil flow
(Closed centre system with basic module for oil flow > 180 l/min [47.6 US gal/min])
- D.II : 210 l/min [55.5 US gal/min] rated oil flow
(Open centre system with basic module for oil flow > 180 l/min [47.6 US gal/min] and pump side module 155G5027/155G5028/155G5029).
- U_s = Signal voltage
- U_{DC} = Supply voltage

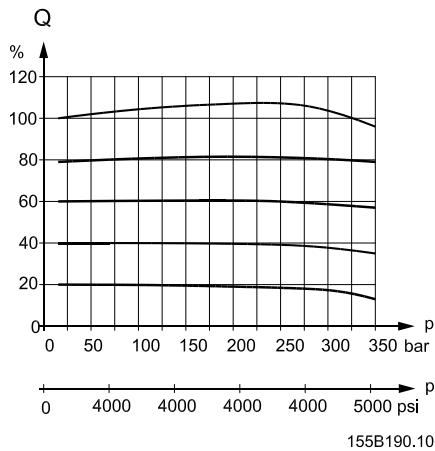
PVG 120 Proportional Valve

Technical Information

Technical Characteristics

PVB, Basic Module


Load independent oil flow




Pressure drop (Q) T in neutral position
(spools with open neutral position) (p)

The oil flow (Q) is shown as a function of
the load (p).

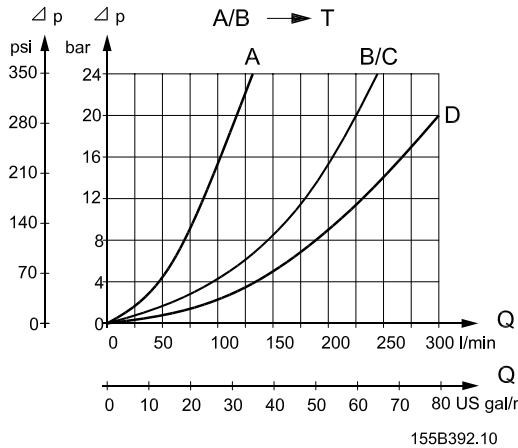Pressure drop A/B → T at full spool travel




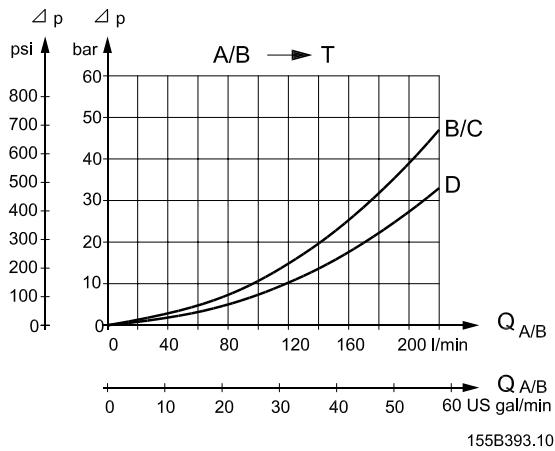Pressure drop A/B → T in neutral position (spools with open neutral position)




**PVLP, Shock Valve
(Pressure Relief Valve in
PVLP)**

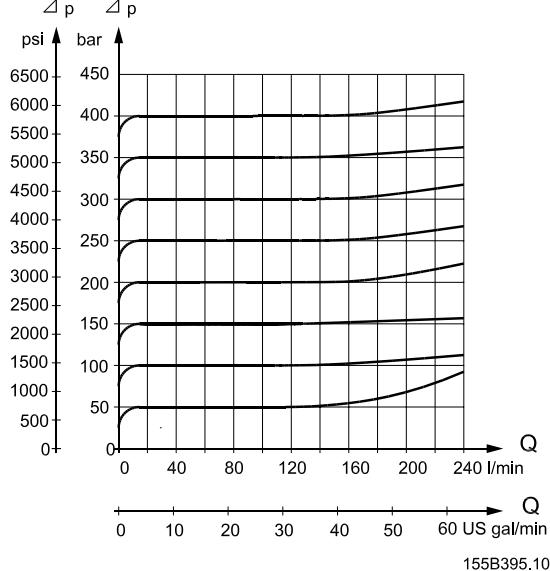The shock valve PVLP is designed to absorb shock effects. Consequently, it shall not be used as a pressure relief valve.




155B395.10

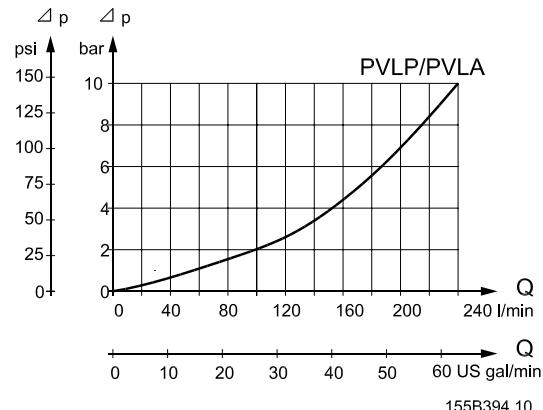**PVLP/PVLA, Suction
Function**
PVLP/PVLA, suction function characteristics


155B394.10

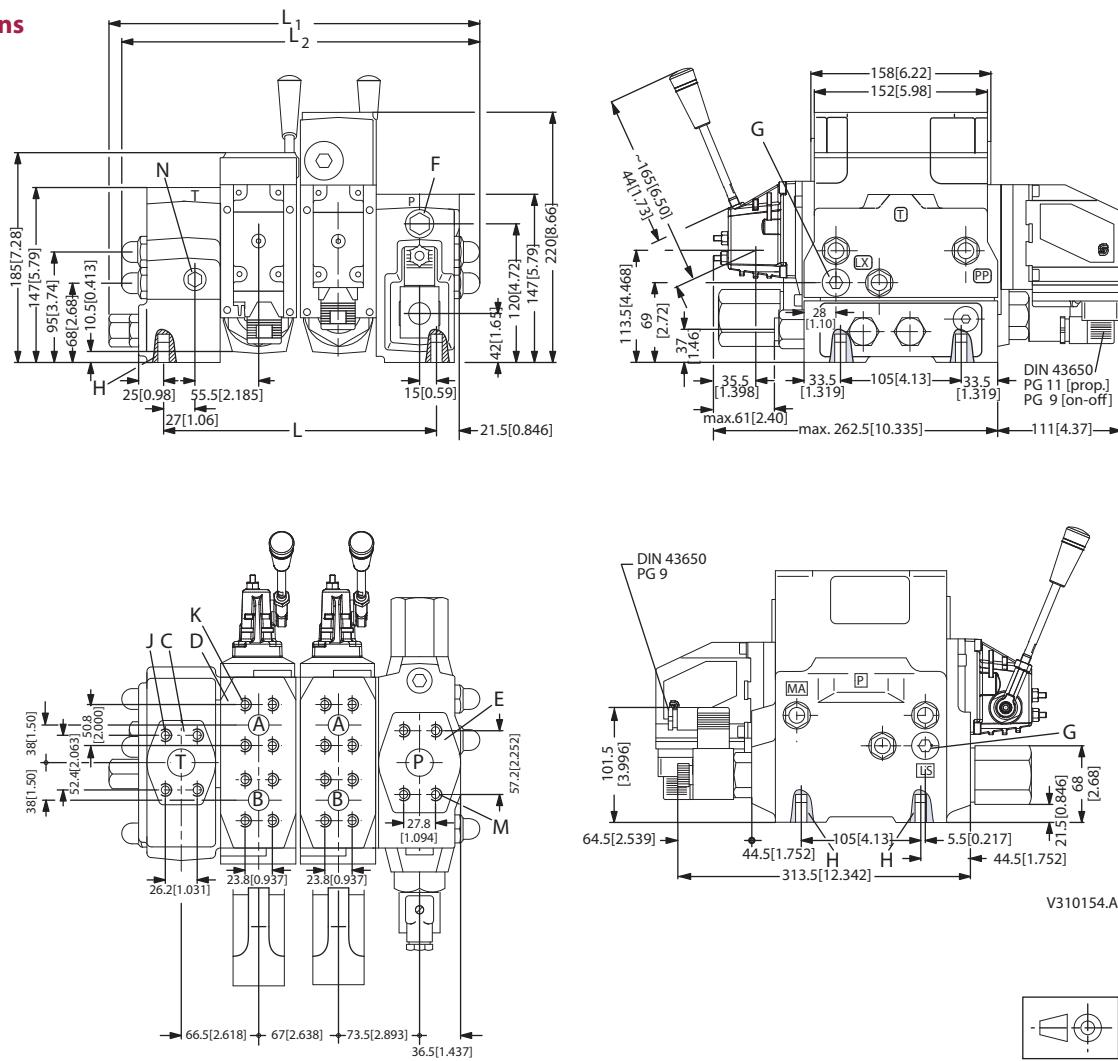Valve Dimensions



C : 1 in SAE flange (210 bar) – [1 in SAE flange/1 5/16 - 12 UN O-ring Boss (3045 psi)]

D : 3/4 in SAE flange (415 bar) – [3/4 in SAE flange/1 1/16 - 12 UN O-ring Boss (6020 psi)]

E : 1 in SAE flange (415 bar) – [1 in SAE flange/1 5/16 - 12 UN O-ring Boss (6020 psi)]

F : G 1/4 – [1/2 in - 20 UNF]

G : G 3/8 – [3/4 in - 16 UNF]

H : M12; 18 mm deep – [7/16 - 14 UNC; 0.7 in deep]


J : M10; 17 mm deep – [3/8 - 16 UNC; 0.7 in deep]

K : M10; 17 mm deep – [3/8 - 16 UNC; 0.7 in deep]

M : M12; 18 mm deep – [7/16 - 14 UNC; 0.7 in deep]

N : G 3/8 – [3/4 in - 16 UNF]


PVB	1	2	3	4	5	6	7	8
L mm	170	237	304	371	438	505	572	639
L in	[6.69]	[9.33]	[11.97]	[14.61]	[17.24]	[19.88]	[22.51]	[25.16]
L1 mm	263.5	330.5	397.5	464.5	531.5	598.5	665.5	732.5
L1 in	[10.38]	[13.02]	[15.66]	[18.30]	[20.94]	[23.58]	[26.22]	[28.86]
L2 mm	255	322	389	456	523	590	657	724
L2 in	[10.05]	[12.69]	[15.33]	[17.97]	[20.61]	[23.25]	[25.89]	[28.53]


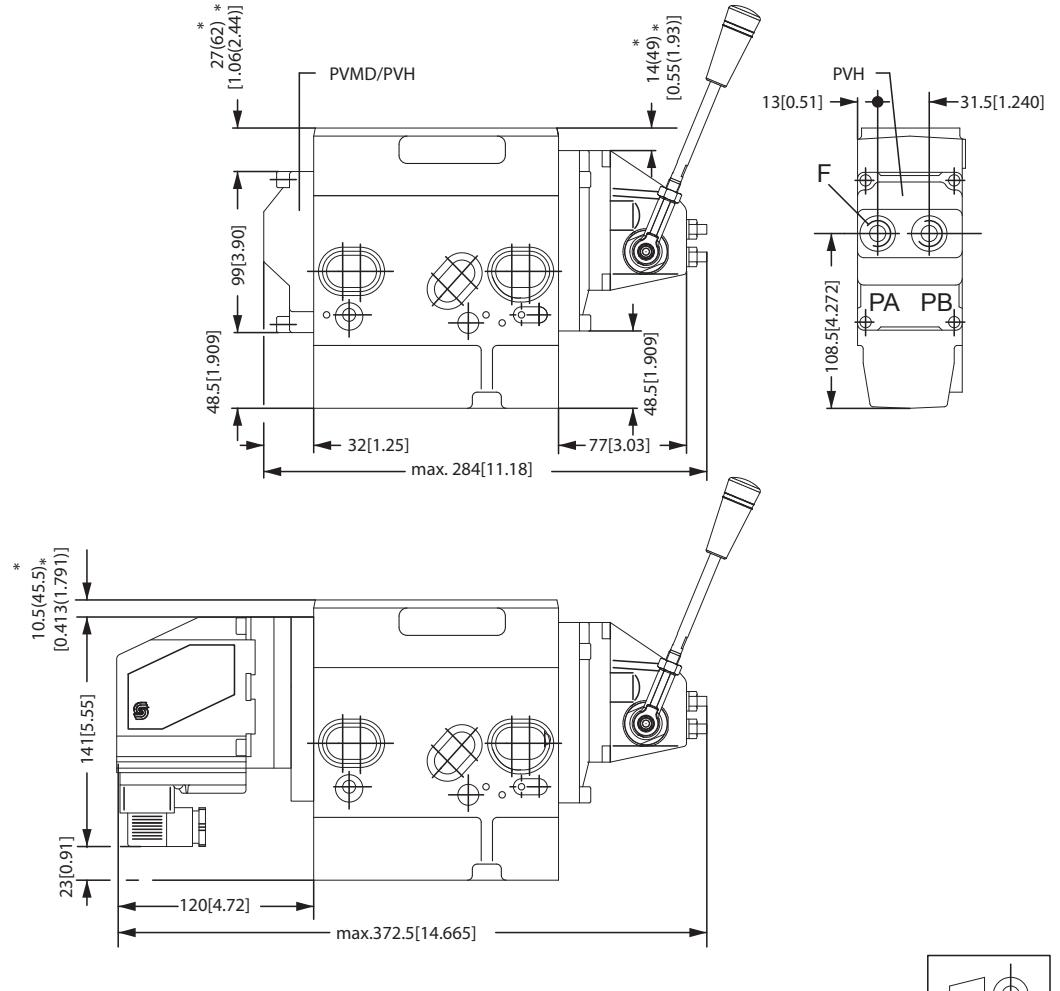
General Dimensions


F : G 1/4 [1/2 in - 20 UNF]

* Dimensions in parenthesis apply to high basic modules

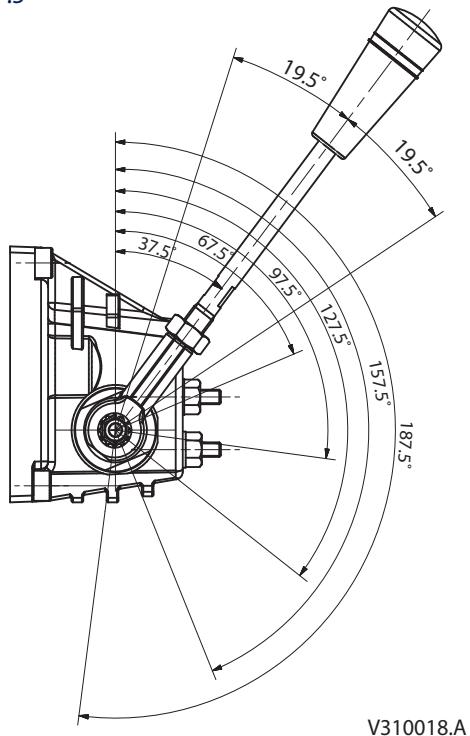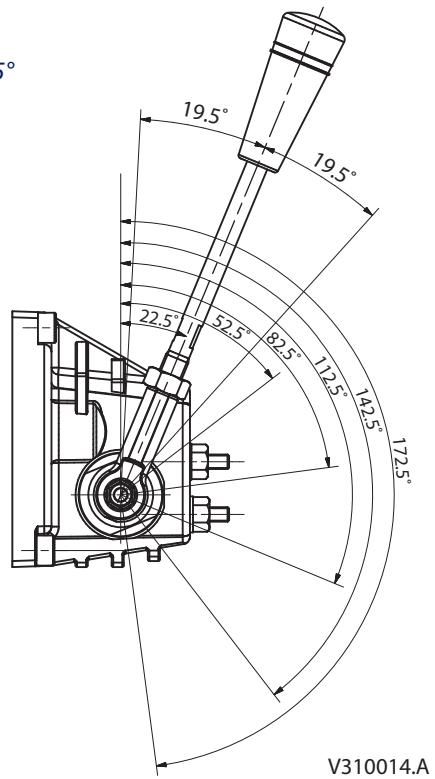V310103.A



PVM, Lever Positions*Base with an angle of 37.5°**Base with an angle of 22.5°*

Building in Safety

All makes and all types of control valves (incl. proportional valves) can fail. Thus the necessary protection against the serious consequences of function failure should always be built into the system. For each application an assessment should be made for the consequences of pressure failure and uncontrolled or blocked movements.

To determine the degree of protection that is required to be built into the application, system tools such as an FMEA (Failure Mode and Effect Analysis) and Hazard and Risk Analysis can be used.

FMEA (Failure Mode and Effect Analysis) IEC EN 61508

FMEA is a tool used for analyzing potential risks. This analytical technique is utilized to define, identify, and prioritize the elimination or reduction of known and/or potential failures from a given system before it is released for production.

Please refer to IEC FMEA Standard 61508.

Hazard and Risk Analysis ISO 12100-1 / 14121

This analysis is a tool used in new applications as it will indicate whether there are special safety considerations to be met according to the machine directives EN 13849. Dependent on the determined levels of conformity this analysis will determine if any extra requirements for the product design, development process, production process or maintenance, i.e. the complete product life cycle.

Warning

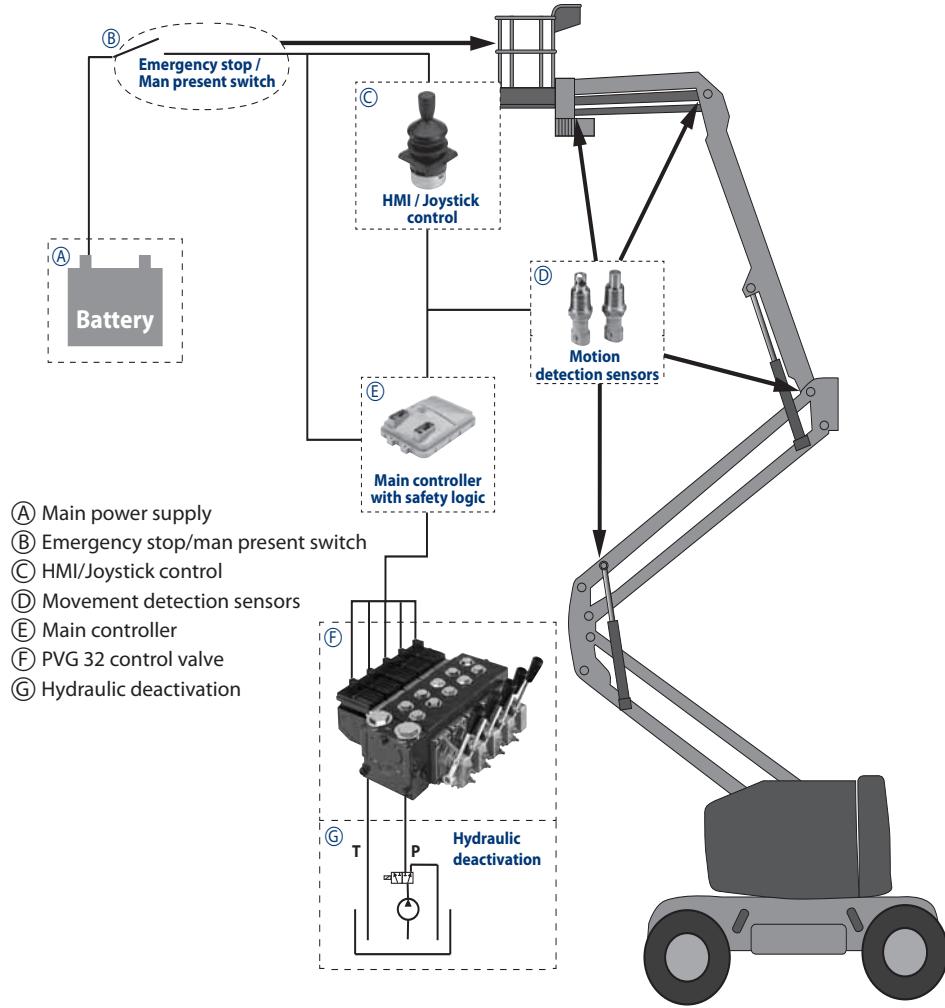
All makes/brands and types of directional control valves – inclusive proportional valves – can fail and cause serious damage. It is therefore important to analyze all aspects of the application.

Because the proportional valves are used in many different operation conditions and applications, the manufacturer of the application is alone responsible for making the final selection of the products – and assuring that all performance, safety and warning requirements of the application are met.

The process of choosing the control system – and safety levels – is governed by the machine directives EN 13849 (Safety related requirements for control systems).


Control System Example

Example of a control system for manlift using PVE Fault monitoring input signals and signals from external sensors to ensure the PLUS+1™ main controllers correct function of the manlift.



P301 316

Electrical block diagram for above illustration

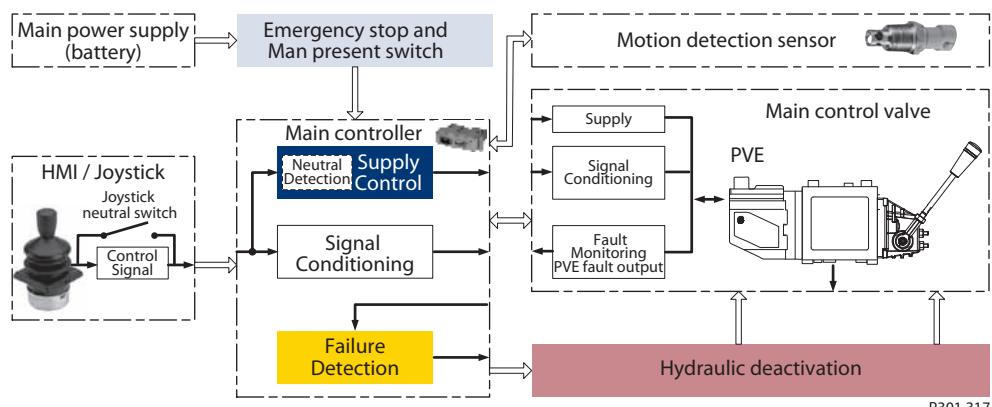


P301 317

⚠ Warning

It is the responsibility of the equipment manufacturer that the control system incorporated in the machine is declared as being in conformity with the relevant machine directives.

**Control System Example
(continued)**

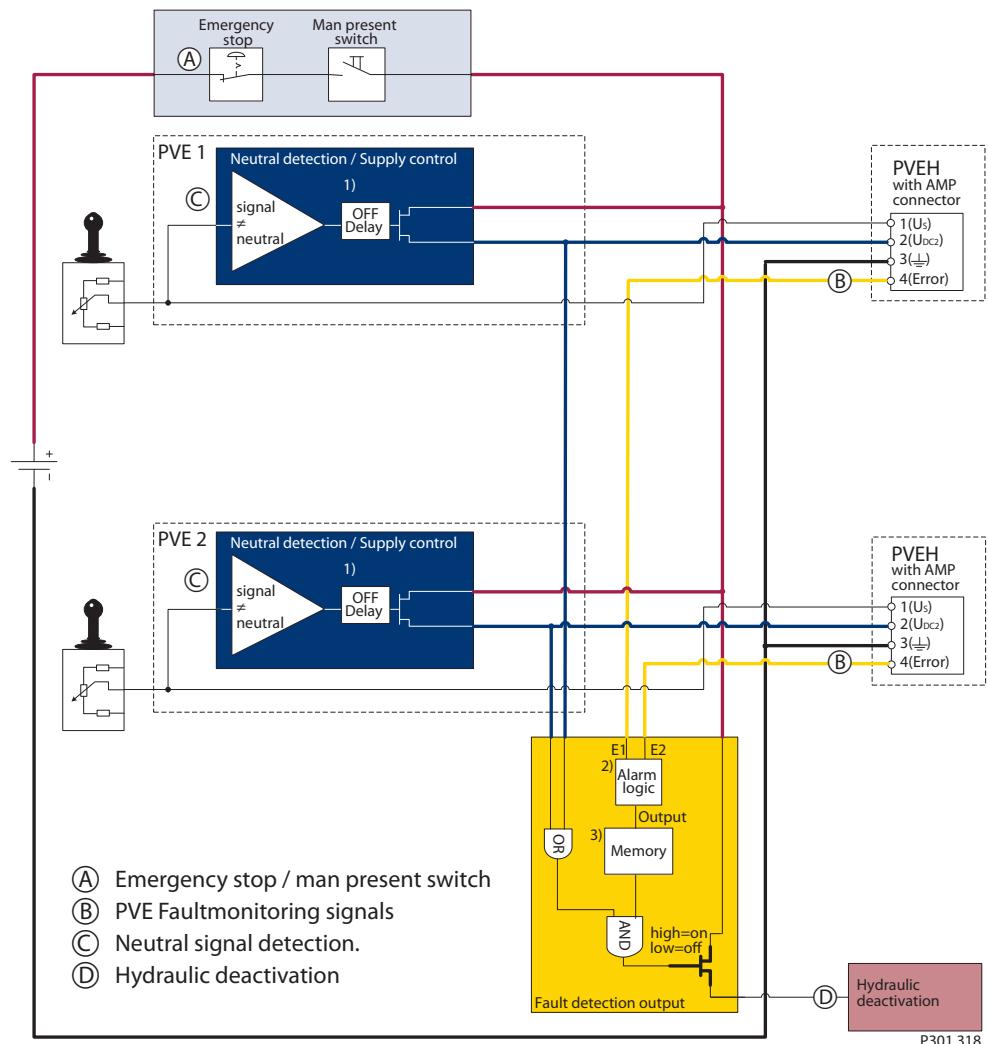Example of a typical wiring block diagram using PVEH with neutral power off switch and fault monitoring output for hydraulic deactivation.



P301 318

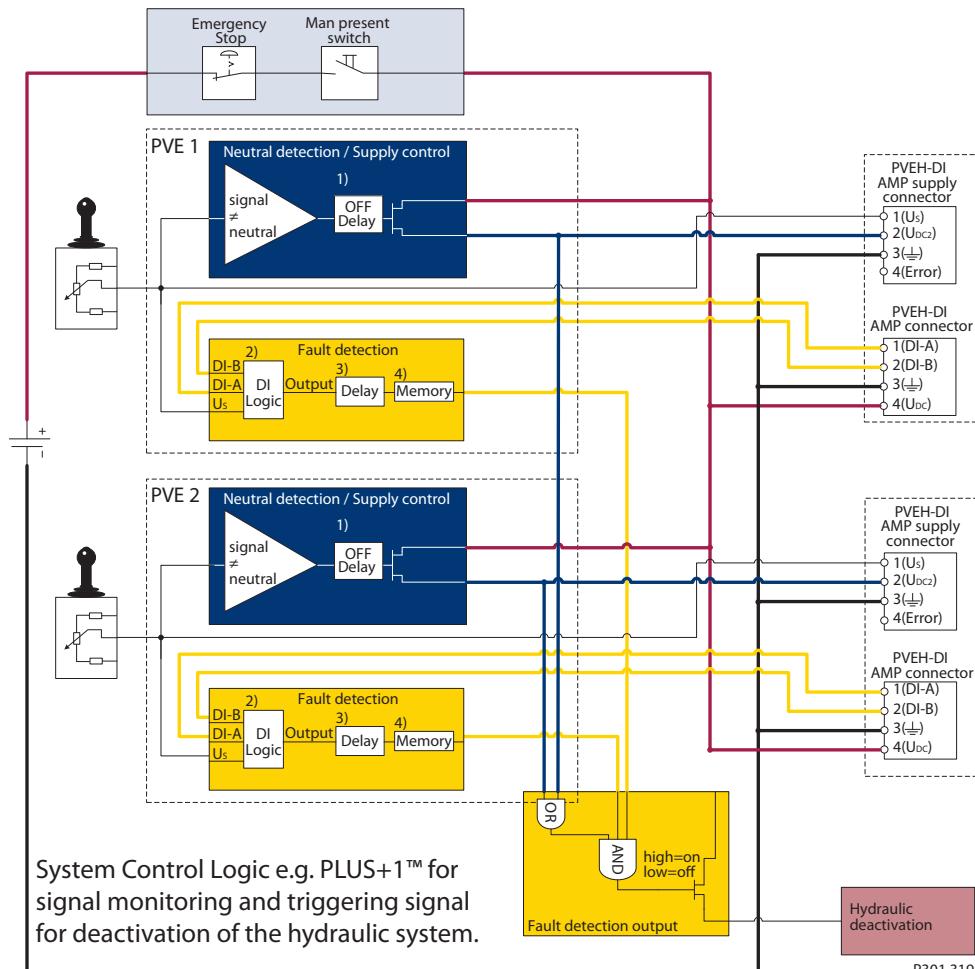
System Control Logic e.g. PLUS+1™ for signal monitoring and triggering signal for deactivation of the hydraulic system.

⚠ Warning

It is the responsibility of the equipment manufacturer that the control system incorporated in the machine is declared as being in conformity with the relevant machine directives.

**Control System Example
(continued)**

Example of fault monitoring for deactivation of the hydraulic system with extra fault inputs using the PVE's with DI (Direction Indication) function.



⚠ Warning

It is the responsibility of the equipment manufacturer that the control system incorporated in the machine is declared as being in conformity with the relevant machine directives.

Other non-electrical modules which can be used in connection with hydraulic deactivation at different levels.

PVG32 – Mainly used in system with fixed displacement pumps

- PVSK, commonly used in crane application - full flow dump
- PVPX, LS dump to tank

PVG100 – Alternative LS dump or pilot supply disconnect

- PVPP, pilot oil supply shut off
- External cartridge valve connecting LS Pressure to Tank
- External cartridge valve connecting main Pressure to Tank

PVG120 – Pump disconnect/block for variable pumps

- PVPE, full flow dump for the PVG 120



PVG 120 Proportional Valve
Technical Information
Notes

Oil

The main duty of the oil in a hydraulic system is to transfer energy; but it must also lubricate the moving parts in hydraulic components, protect them against corrosion, and transport dirt particles and heat out of the system. It is therefore important to choose the correct oil with the correct additives. This gives problem-free operation and long working life.

Mineral oil

For systems with PVG 120 valves Sauer-Danfoss recommends the use of mineral-based hydraulic oil containing additives: Type H-LP (DIN 51524) or HM (ISO 6743/4).

Non-flammable fluids

Phosphate-esters (HFDR fluids) can be used without special precautions. However, dynamic seals must be replaced with FPM (Viton) seals. Please contact the Sauer-Danfoss Sales Organisation if the PVG 120 valve is to be used with phosphate-esters. The following fluids should only be used according to agreement with the Sales Organisation for Sauer-Danfoss:

- Water-glycol mixtures (HFC fluids)
- Water-oil emulsions (HFB fluids)
- Oil-water emulsions (HFAE fluids)

Biodegradable oils

PVG 120 valves can be used in systems using rape-seed oil. The use of rape-seed oil is conditional on

- it complying with the demands on viscosity, temperature and filtration etc. (see *chapters below and technical data page 10*).
- the operating conditions being adapted to the recommendations of the oil supplier.

Before using other biodegradable fluids, please consult the Sauer-Danfoss Sales Organisation.

Particle Content, Degree of Contamination

Oil filtration must prevent the particle content from exceeding an acceptable level, i.e. an acceptable degree of contamination.

Maximum contamination for PVG 120 is 23/19/16 (see ISO 4406).

Calibration in accordance with the ACFTD method.

In our experience a degree of contamination of 23/19/16 can be maintained by using a filter fineness as described in the next section.

Filtering

Effective filtration is the most important precondition in ensuring that a hydraulic system performs reliably and has a long working life. Filter manufacturers issue instructions and recommendations. It is advisable to follow them.

System filters

Where demands for safety and reliability are very high a pressure filter with bypass and indicator is recommended. Experience shows that a 10 µm nominal filter (or finer) or a 20 µm absolute filter (or finer) is suitable.

It is our experience that a return filter is adequate in a purely mechanically operated valve system.

The fineness of a pressure filter must be selected as described by the filter manufacturer so that a particle level of 23/19/16 is not exceeded. See "Particle content, degree of contamination".

The filter must be fitted with pressure gauge or dirt indicator to make it possible to check the condition of the filter.

In systems with differential cylinders or accumulators the return filter must be sized to suit the max. return oil flow. Pressure filters must be fitted to suit max. pump oil flow.

Internal filters

The filters built into PVG 120 are not intended to filter the system but to protect important components against large particles.

Such particles can appear in the system as a result of pump damage, hose fracture, use of quick-couplings, filter damage, starting up, contamination, etc.

The filter that protects the pilot supply in the tank side module has a mesh of 125 µm. It is obtainable as a spare part and is easy to replace.

The filter protecting the essential PVE parts has a mesh of 125 µm.

Conversion Factors

1 Nm	= 885.1 lbf·in
1 N	= 22.48 lbf
1 bar	= 14.50 psi
1 mm	= 0.0394 in
1 cm ³	= 0.061 in ³
1 l	= 0.22 gallon, UK
1 l	= 0.264 gallon, US
°F	= 1.8 °C + 32

Order Form

An order form for Sauer-Danfoss PVG 120 hydraulic valve is shown on next page. The form can be obtained from the Sauer-Danfoss Sales Organisation. The module selection chart on the next page and the order form are divided into fields.

Each module has its own field:

- 0: PVP, pump side modules
- d: PVPD, PVPH and PVPE, accessory modules
- 1-8: PVB, basic modules
- e: PVBS, main spools
- f: PVBP, PVBR, PVBU and PVBC, accessory modules
- a: PVM, mechanical actuation
- c: PVMD, cover for mechanical operation
PVH, cover for hydraulic operation
PVEO and PVEH, electrical actuations
- b: PVLP, shock and suction valve
PVLA, suction valve
- 9: PVT, tank side module
- 10: PVAS, assembly kit

Please state:

- Code numbers of all modules required
- Required setting (p) for pump side module
- Required setting of LS_{A/B} pressure relief valves, if accessory module PVBR is ordered.

Order Form

Reordering

The space at the top right-hand corner of the form is for Sauer-Danfoss to fill in. The code number for the whole of the specified valve group (PVG No.) is entered here. In the event of a repeat order all you have to do is enter the number Sauer-Danfoss has given on the initial confirmation of order.

If PVG 120 is to be used with phosphate-esters this must be stated on the order form (see also page 38, "Non-flammable fluids").

PVG 120
Specification Sheet

Subsidiary / Dealer	PVG No.
Customer	Customer No.
Application	Revision No.

Function	A-Port	0 155G p = bar	155G	B-Port
a 155G	1 155G	155G	e	155G c
	f 155G	LS _{AB}	bar	155G b
a 155G	2 155G	155G	e	155G c
	f 155G	LS _{AB}	bar	155G b
a 155G	3 155G	155G	e	155G c
	f 155G	LS _{AB}	bar	155G b
a 155G	4 155G	155G	e	155G c
	f 155G	LS _{AB}	bar	155G b
a 155G	5 155G	155G	e	155G c
	f 155G	LS _{AB}	bar	155G b
a 155G	6 155G	155G	e	155G c
	f 155G	LS _{AB}	bar	155G b
a 155G	7 155G	155G	e	155G c
	f 155G	LS _{AB}	bar	155G b
a 155G	8 155G	155G	e	155G c
	f 155G	LS _{AB}	bar	155G b
Remarks		9 155G		
		10 155G		
		11 155G		

Filled in by	Date
--------------	------

991L1868 ver. 03.2002

PVB, high basic module

	SAE flange	O-ring Boss	Metric flange	Weight kg [lb]
Facilities for shock valves AB	155G6007	155G6006	155G6005	10.2 [22.5]

PVB, low basic module


	SAE flange	O-ring Boss	Metric flange	Weight kg [lb]
No facilities for shock valves AB	155G6016	155G6015	155G6014	8.9 [19.6]

Accessory modules for PVB

		Weight kg [lb]
Plug, PVBP	155G6081	0.4 [0.9]
LSA/B press. relief valve, PVBR	155G6080	0.4 [0.9]
External LS connection, PVBC	155G6082	0.4 [0.9]
Module for oil flow > 180 l/min [47.6 US gal/min], PVBU	155G6035	0.4 [0.9]

PVBS, mechanical actuation

Symbol	A	B	C	D
	65 [17.2]	95 [25.1]	130 [34.3]	180 [47.6]
		155G6464	155G6466	155G6468
			155G6476	155G6478
Weight	kg [lb]	0.35 [0.8]	0.35 [0.8]	0.35 [0.8]

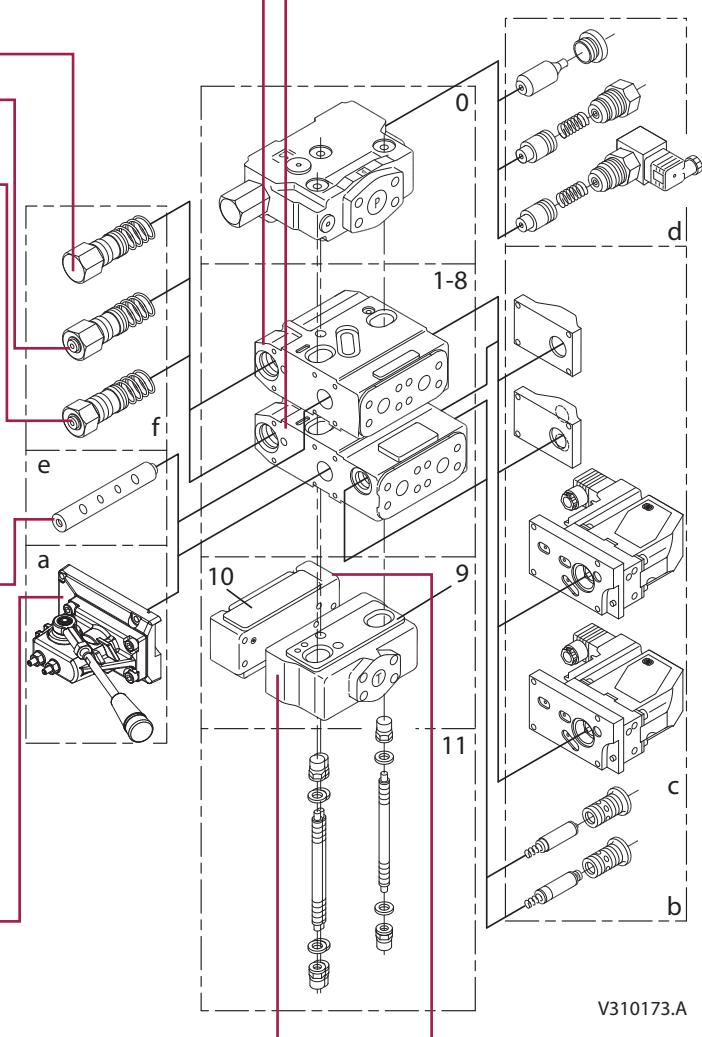

V310173.A

PVM, mechanical actuation

PVM + PVMD or PVM + PVE	155G3040	22.5°
	155G3041	37.5°
PVM + PVH	155G3050	22.5°
	155G3051	37.5°
Weight	kg [lb]	0.5 [1.1]

PVT, tank side module


	SAE flange	O-ring Boss	Metric flange	Weight kg [lb]
Upper part excl. LX connection	155G7022	155G7021	155G7020	4.6 [10.1]
Upper part incl. LX connection	155G7025	155G7024	155G7023	4.6 [10.1]
Lower part incl. pilot oil supply PVE for		155G7042	155G7040	4.4 [9.7]
Lower part excl. pilot oil supply for PVE		155G7062	155G7060	4.4 [9.7]
Lower part incl. pilot oil supply for PVH		155G7044	155G7043	4.4 [9.7]

PVP, pump side module

		O-ring Boss	SAE flange	Metric flange	Weight kg [lb]
Open centre	Excl. PVPD, PVPH, PVPE	155G5023	155G5037	155G5021	10.0 [22.1]
	For PVB-oil flow > 180 l/min [47.6 US gal/min]	155G5028	155G5029	155G5027	10.0 [22.1]
	Excl. PVPD, PVPH, PVPE				
Closed centre	Incl. pressure relief valve and plug PVPD	155G5022	155G5038	155G5020	10.2 [22.5]
	Excl. pressure relief valve	155G5031	155G5032	155G5030	11.0 [24.3]

Accessory modules for open centre PVP

		Weight kg [lb]
Plug, PVPD	155G5041	0.4 [0.9]
Hydraulic relief valve, PVH	155G5061	0.5 [1.1]
Electrical relief valve, PVPE	12 V 155G5052	0.7 [1.5]
	24 V 155G5054	0.7 [1.5]

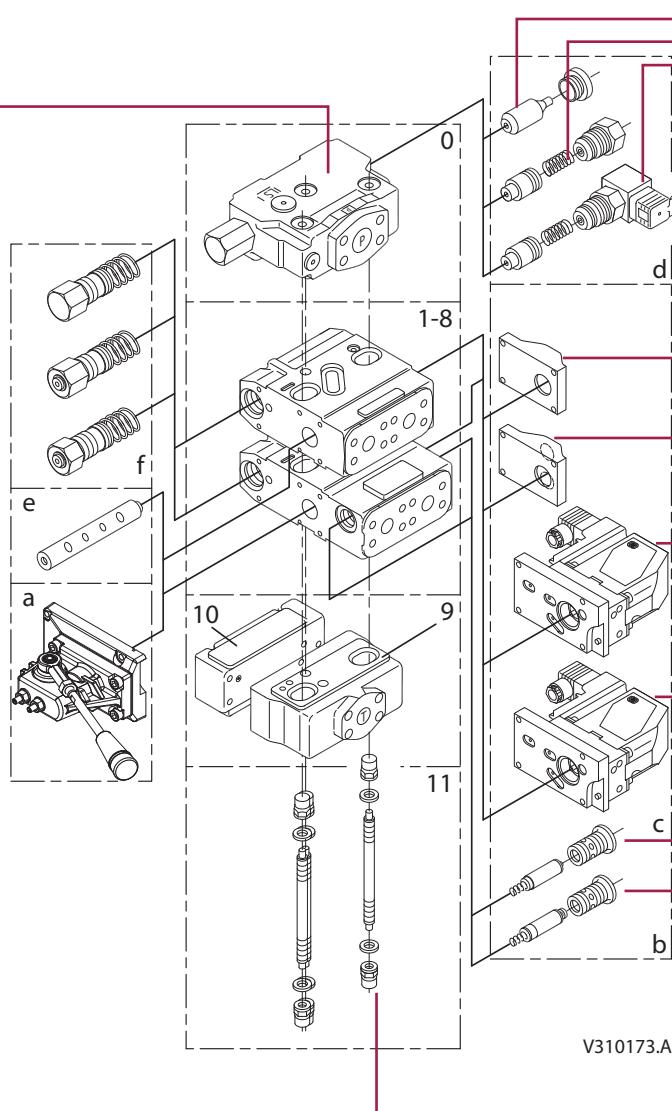
PVAS, assembly kit

PVB's	1	2	3	4	5	6	7	8
	155G8031	155G8032	155G8033	155G8034	155G8035	155G8036	155G8037	155G8038
Weight kg [lb]	0.8 [1.8]	1.0 [2.2]	1.1 [2.4]	1.2 [2.6]	1.4 [3.1]	1.7 [3.7]	1.9 [4.2]	2.1 [4.6]

PVMD, cover for PVM

	Weight kg [lb]
155G4061	0.3 [0.7]

PVH, cover for PVRHH

		Weight kg [lb]
1/2 in - 20 UNF	155G4021	0.4 [0.9]
G 1/4	155G4022	0.4 [0.9]

Electrical actuation PVE

Connector	PVEH 11 - 32 V Fault monitoring		PVEO	
	Active	Passive	12 V	24 V
Hirschmann	155G4092	155G4093	155G4272	155G4274
AMP	155G4094	155G4095	155G4282	155G4284
Weight kg [lb]	1.25 [2.76]	1.25 [2.76]	1.0 [2.2]	1.0 [2.2]

PVLA suction valve A/B

	Weight kg [lb]
155G1065	0.2 [0.4]

PVLP, shock and suction valve A/B

Pressure setting		
bar	[psi]	
50	725	155G0050
75	1100	155G0075
100	1450	155G0100
125	1800	155G0125
150	2200	155G0150
175	2550	155G0175
200	2900	155G0200
225	3250	155G0225
250	3650	155G0250
275	4000	155G0275
300	4350	155G0300
325	4700	155G0325
350	5100	155G0350
375	5400	155G0375
400	5800	155G0400
Weight kg [lb]	0.175 [0.386]	



Products we offer:

- Bent Axis Motors
- Closed Circuit Axial Piston Pumps and Motors
- Displays
- Electrohydraulic Power Steering
- Electrohydraulics
- Hydraulic Power Steering
- Integrated Systems
- Joysticks and Control Handles
- Microcontrollers and Software
- Open Circuit Axial Piston Pumps
- Orbital Motors
- PLUS+1™ GUIDE
- Proportional Valves
- Sensors
- Steering
- Transit Mixer Drives

Sauer-Danfoss is a global manufacturer and supplier of high-quality hydraulic and electronic components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market. Building on our extensive applications expertise, we work closely with our customers to ensure exceptional performance for a broad range of off-highway vehicles.

We help OEMs around the world speed up system development, reduce costs and bring vehicles to market faster.
Sauer-Danfoss – Your Strongest Partner in Mobile Hydraulics.

Go to www.sauer-danfoss.com for further product information.

Wherever off-highway vehicles are at work, so is Sauer-Danfoss.

We offer expert worldwide support for our customers, ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide comprehensive global service for all of our components.

Please contact the Sauer-Danfoss representative nearest you.

Members of the Sauer-Danfoss Group:

Comatrol

www.comatrol.com

Schwarzmueller-Inverter

www.schwarzmueller-inverter.com

Turolla

www.turollaocg.com

Valmova

www.valmova.com

Hydro-Gear

www.hydro-gear.com

Sauer-Danfoss-Daikin

www.sauer-danfoss-daikin.com

Local address:

Sauer-Danfoss (US) Company
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000
Fax: +1 515 239 6618

Sauer-Danfoss ApS
DK-6430 Nordborg, Denmark
Phone: +45 7488 4444
Fax: +45 7488 4400

Sauer-Danfoss GmbH & Co. OHG
Postfach 2460, D-24531 Neumünster
Krokamp 35, D-24539 Neumünster, Germany
Phone: +49 4321 871 0
Fax: +49 4321 871 122

Sauer-Danfoss-Daikin LTD.
Shin-Osaka TERASAKI 3rd Bldg. 6F
1-5-28 Nishimiyahara, Yodogawa-ku
Osaka 532-0004, Japan
Phone: +81 6 6395 6066
Fax: +81 6 6395 8585

W W W . s a u e r - d a n f o s s . c o m