

DIAPHRAGM SENSING PRESSURE REDUCING VALVE

P15SS

DN 1/4" – 1/2"; DN15

DESCRIPTION

The ADCA P15 series **direct acting, spring-loaded diaphragm sensing**, pressure reducing valves, are designed for use on compressed air and other gases compatible with the materials of construction.

They are suitable for pressure reducing stations where low capacity is required.

Connections are female screwed or flanged.

MAIN FEATURES

Compact design.

Machined from barstock materials.



OPTIONS:

Metal to metal or soft valve.

Relieving-Internal relief valve to allow reduce outlet pressure in a no-flow condition.

Built-in strainer.

Outlet 1/4" gauge connection on body.

Panel mounting nut and thread.

Straight or angle connections.

USE:

Compressed air and other gases compatible with the construction.

Special version available for steam, on request.

AVAILABLE MODELS:

P15SS – Stainless steel.

SIZES:

DN 1/4", 3/8" and 1/2".

DN 15

CONNECTIONS:

Female screwed ISO7/1Rp(BS 21) or NPT.

Flanged EN 1092-1 PN40 / PN63

Special flanges upon request.

INSTALLATION:

Horizontal installation.

An "Y" strainer should be provided upstream the valve.

See IMI, installation and maintenance instructions

ORDER

REQUIREMENTS:

Type of fluid

Maximum operating temperature

Inlet pressure and required outlet pressure

Capacity (maximum and minimum).

CAPACITIES

Valve Size	1/4"	3/8"	1/2"
KVs (m3/h)	1,15	1,15	1,35

LIMITING CONDITIONS

Valve model	P15SS
Body design conditions	PN 63
Max.upstream pressure	50 bar
Max.downstream pressure	15 bar
Min.downstream pressure	0,2 bar
Max.design temperature *	80 °C
Max.recommended reducing ratio	40:1

*Other on request.



CE MARKING (PED - European Directive 97/23/EC)

PN 16-PN63	Category
DN 8 to 15	SEP - art. 3, paragraph3

DIMENSIONS (mm)-Screwed						EN 1092-1 Flg.PN16/40			EN 1092-1 Flg.PN63/100		
SIZE DN	A	A1	B	C	WGT. Kgs	D*	E	WGT. Kgs	D*	E	WGT. Kgs
1/4"	80	60	20	170	2,4	-	-	-	-	-	-
3/8"	80	70	20	170	2,8	-	-	-	-	-	-
1/2"-15	80	-	20	170	3,3	150	47,5	4,7	210	52,5	4,1

* Different lengths on request.


Note: DN15 PN16/40 face to face dim. was adopted as per DN20

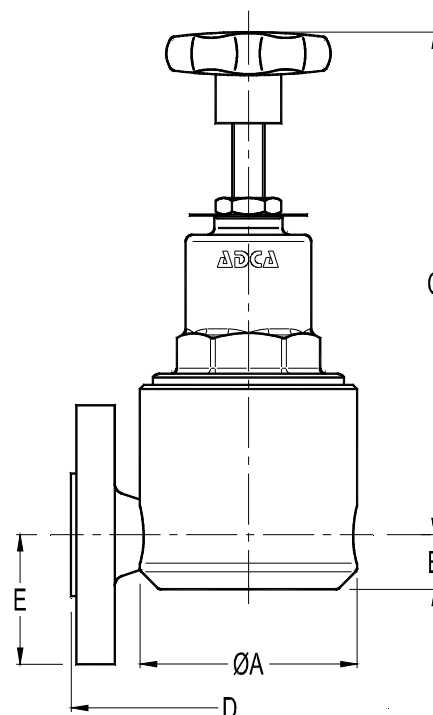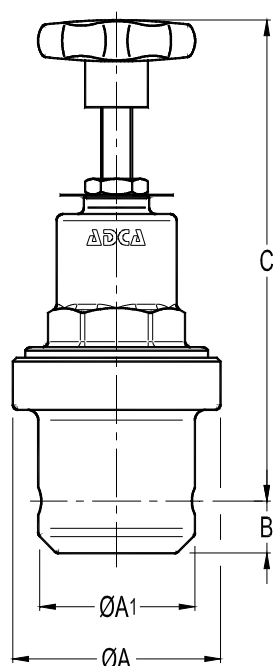

MATERIALS		
POS.	DESIGNATION	MATERIAL
1	VALVE BODY	AISI316 / 1.4401 ; CF8M / 1.4408
2	TOP COVER	AISI316 / 1.4401 ; CF8M / 1.4408
3	SEAT	AISI316 / 1.4401
4	* GASKET	AISI304 / 1.4301
5	PUSHROD	AISI316 / 1.4401
6	* VALVE HEAD	NBR-EPDM-PTFE,etc
8	* VALVE SPRING	AISI302 / 1.4300
9	* STRAINER SCREEN	AISI304 / 1.4301
10	* DIAPHRAGM	AISI301 / 1.4310
11	* GASKET	ST.STEEL GRAPHITE
12	* GASKET	ALUMINIUM
13	SPRING PLATE	BRASS
15	* ADJUSTMENT SPRING	SPRING STEEL
16	TOP SPRING PLATE	BRASS
17	ADJUSTMENT SCREW	AISI304 / 1.4301
18	LOCKNUT	ST.STEEL A2-70
19	HANDWHEEL	PLASTIC
20	SPRING IDENT. PLATE	ALUMINIUM

* Available spare parts.

Remarks: All valves have a serial number. In case of non-standard valves this number must be supplied if spare parts are ordered.

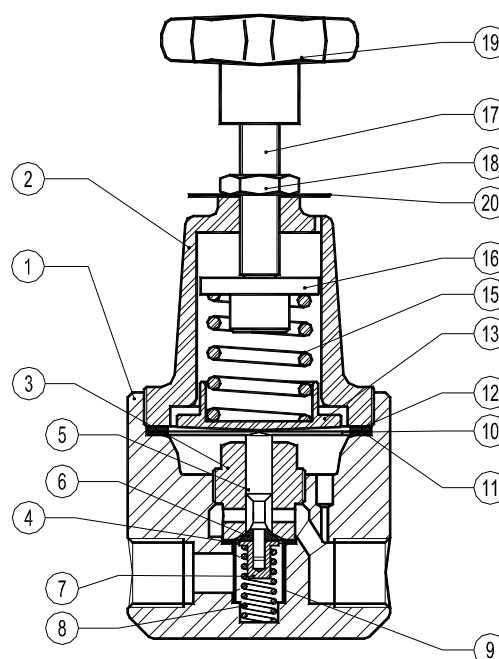

ORDERING CODES P15

Valve Model				P15	.	1	W	N	C	R	.	A	15
P15SS - Diaphragm sensing				P15									
Outlet spring range													
Nº1 - 0,2 to 1,5 bar						1							
Nº2 - 0,3 to 3 bar						2							
Nº3 - 0,8 to 8 bar						3							
Nº4 - 1,5 to 15 bar						4							
Aplication													
Water							W						
Gases							G						
Oxygen (Degreased)							O						
Seal material													
NBR							N						
EPDM							E						
PTFE							T						
FPM/VITON							V						
Maximum inlet pressure													
30 bar								C					
50 bar a)								D					
Diaphragm material													
Stainless steel (Non-relieving)									S				
Rubber/PTFE (Relieving or non-relieving)									R				
Gauge port 1/4"													
Without gauge ports										(1)			
Gauge port on the left side (Related to the flow direction)										4			
Gauge port on the right side (Related to the flow direction)										3			
Gauge ports on both sides										2			
Relieving													
Non-relieving										(1)			
Relieving (Only for non-dangerous gases)										R			
Pipe connection													
Threaded BSP ISO 7/1 Rp												A	
Threaded NPT ANSI B1.20.1												C	
Socket weld SW ANSI B16.11												H	
Butt weld BW ANSI B16.25												I	
Flanged EN1092-1 PN40												N	
Flanged EN1092-1 PN63												O	
Flanged ANSI B16.5 150#												U	
Flanged ANSI B16.5 300#												V	
Flanged ANSI B16.5 600#												W	
Size													
DN 1/4"													08
DN 3/8"													10
DN 1/2" or DN 15													15
Special valves / Extras b)													E

(1) Omitted if a standard valve is requested

a) The 50 bar inlet available only with spring Nº4

b) Full description or additional codes have to be added in case of non-standard combination.