

DP620LX Series PLUS+1™ Mobile Machine Displays

Introduction

The Sauer-Danfoss DP620LX Series is an element of the PLUS+1™ family of mobile machine management products.

The DP620LX design provides mobile machine OEMs with a rugged, high performing color display, both in-cab and open usage.

These Transflective, thin film transistor (TFT), high resolution color displays fit your budget without losing performance quality.

The DP620LX features include robust mechanical, electrical and environmental specifications that meet the harsh operating conditions found in mobile machine applications.

Local Address:




PLUS E1™
by SAUER-DANFOSS

DP620LX Graphical Display


Features

- User-programmable with PLUS+1 GUIDE (Graphical User Integrated Development Environment)
- Monochrome LCD 320 x 240 pixels
- Protective glass integrated into keypad provides superior antiglare and contrast control under all light conditions
- Two mounting options:
 - Flush mount in dashboard
 - Stand alone post mount according to VESA standard 75 mm x 75 mm [2.953 in x 2.953 in]
- Fully integrated connectors and silicone keypad provide water and dust protection from all sides
- Wide storage and operating temperature range
- GORE-TEX® membrane prevents moisture ingress and screen fogging
- Keypad with 14 buttons (8 soft-keys + 6 buttons for navigation)
- All buttons have green backlight design for low light and night use
- Ultra-bright red alarm LED
- On board real-time clock
- USB port for fast software down loads and uploads
- Integrated light sensor for automatic backlight adjustment
- Inputs for external menu navigation button give the driver full control while driving
- Digital output for external ALARM buzzer
- 16 MB application log memory

Dimensions and Pin Assignments

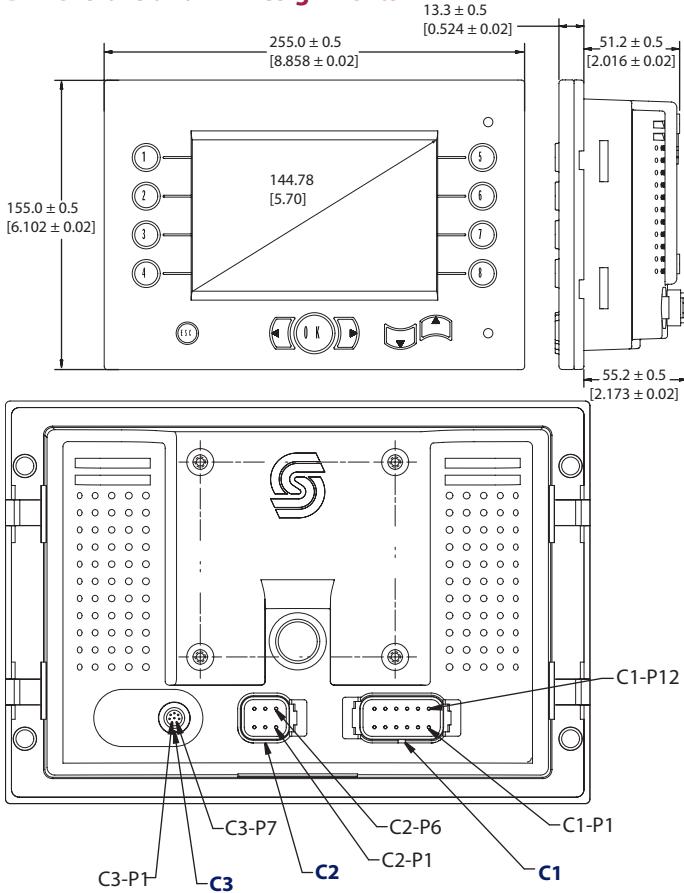

Deutsch® DTMO6 12 Pin



C1 Pin	Function
C1-P1	Power ground -
C1-P2	Power supply +
C1-P3	CAN1 High +
C1-P4	CAN1 Low -
C1-P5	AIN/ CAN shield
C1-P6	CAN0 High +
C1-P7	CAN0 Low -
C1-P8	Sensor supply
C1-P9	Multifunction-input
C1-P10	Multifunction-input
C1-P11	Analog/Digital input
C1-P12	Digital output

Deutsch DTMO6 6 Pin



C2 Pin	Function
C2-P1	Battery ground
C2-P2	Redundant power supply
C2-P3	Redundant CAN1 High +
C2-P4	Redundant CAN1 Low -
C2-P5	CAN shield/ AIN
C2-P6	Digital/ AIN

Binder 702 Series USB 8 Pin



C3 Pin	Function
C3-P1	USB device Vbus
C3-P2	USB device data -
C3-P3	USB device data +
C3-P4	USB device ground
C3-P5	USB host ground/ RS232
C3-P6	USB host data +/ RS232 RxD
C3-P7	USB host data -/RS232 TxD
C3-P8	USB host Vbus

Specifications

Processor	ARM 11, 532 MHZ
RAM	512 MB
FRAM	8 kb
Supply voltage/ Current consumption	9 to 70 Vdc/ 1 AMP @ 14V, 0.5 AMP @ 28V
LCD glass	TFT with 15 bit resolution
Viewable area	155.00 mm x 89.20 mm (6.102 in x 3.512 in)
Ingress Protection (IP) rating (with sealing plugs in unused connections)	IP 67
Operating temperature	-30° C to 70° C (-22° F to 158° F)
Storage temperature	-40° C to 85° C (-40° F to 185° F)
Weight	1100g
Vibration/ Shock	3.17g/50g
EMC/ ESD	100V/m/15kV

Model Features

	A	B	C	D	E	F	G	Part number
DP620LX	10	02	06	02	04	01	11100065	
A Model Name	DP620LX PLUS+1™ Mobile Machine Displays							
B Input/Output Options	10 2 CAN, 2 DIN/AIN/Freqin/Rheo/4-20mA In, 2 VideoIn, 2 AIN/CAN Shield							
C Real Time Clock/ Low Temperature Functionality	02 RTC							
D Flash Memory/ Application Key	06 512 MB/ without application key							
E Application Log (Vault Memory)	02 16 MB							
F USB Port Type	04 USB device, host/ RS232 in rear							
G Screen Size/ Feature	01 320 x 240 monochrome transreflective							

Sauer-Danfoss comprehensive technical information is on line at: www.sauer-danfoss.com